

UW5757DPS

Família	Máquina de lavar louça profissional
Subfamília	Lava utensílios
Dimensões do cesto	570x570 mm
Rinse pump	HTR system
Wash pump	Standard
Ligaçāo energética	400 V 3N~ / 22,7 A / 9,0 kW / 50 Hz



Mercado

Soluções	Hotelaria; Restaurantes/ Pubs; Padarias e pastelarias; Indústria de comida congelada; Retalho alimentar; Outras indústrias de comida; Catering e cantinas; QSR
-----------------	--

Design

Design	Utensil washer	Cor dos LEDs	Vermelho
---------------	----------------	---------------------	----------

Especificações técnicas

Trays washing option	Sim	Carga de enxaguamento	0,4 l/h
Water consumption per cycle	5 l	Altura de carga operável	640 mm
Minimum water consumption per cycle	1,8 l	Altura de porta aberta	1985 mm
Temperatura pré-definida de ligação da água	5°C	Profundidade com porta aberta	1110 mm
Max. inlet temperature	60°C	Altura máxima sem cesto	650 mm
Dureza máxima da água	12°F - 7°dH	Dimensões de produto LxPxA:	685x750x1710 mm
Carga de detergente	1,5 l/h		

Programas

Program table
Programas de lavagem de utensílios
Utensil washer

120" (92" a 60°C - enxaguamento 18" a 85°C); 240" (212" a 60°C - 10" pausa de escorrimento - enxaguamento 18" a 85°C); Sem fim a 60°C - 10" pausa de escorrimento - enxaguamento 18" a 85°C

Numero máximo de cestos/hora
30

Ligação elétrica

Tank heating element power	4500 W	Ligaçāo pré-definida	9000 W
Boiler heating element power	7500 W	Ligaçāo eléctrica opcional	230 V 3~ / 39,5 A / 9,0 kW / 50 Hz
Wash pump power	1600W		

Interface

Display	4 dígitos	Luz indicadora On/Off	Sim
Número de botões	3		

ESPECIFICAÇÕES TÉCNICAS

Tank	Com base estampada	Filter	2-stage filter system
Tipologia	Parede única	Capacidade da cuba	36 l
Material da cuba	Aço Inox AISI 304	Capacidade da caldeira	12 l
Painel traseiro	Porta galvanizada	Ruído	LpA<70 dB(A)
Sistema de lavagem superior	One wash and one split rinse spray arms, stainless steel	Classe de Proteção	IPX4
Sistema de lavagem inferior	A 3-arms wash and one split rinse spray arms, stainless steel	Adjustable feet	Sim
Filtro da cuba	Aço inox	Altura max. de drenagem	800 mm
Guias dos cestos	Soldadas		

Acessórios incluídos

Cesto para talheres	1x WH00S02	Mangueira de abastecimento de água	Sim - 2,5m
Cesto de fundo plano	1x WB5757G01	Mangueira de drenagem	Sim - 2m


Equipamentos

Bomba de drenagem	Sim	Renovação parcial da água na cuba e bomba de drenagem integrada	Sim
Peristaltic detergent dispenser	Manual		
Peristaltic rinse-aid dispenser	Manual	Diâmetro do tudo de abastecimento de água	DN15 - ½"

Rinse boiler Thermostop system	Yes - default	Ø do tubo de drenagem	DN20-G 3/4"
Wash pump soft start system	Sim	Comprimento da mangueira de detergente (vermelha)	2,2m
Break tank	Sim	Comprimento da mangueira de enxaguamento (azul)	2,2m

Dados de logística

Largura da embalagem (mm)	860 mm	Dimensões do produto embalado (mm)	1910X860X820
Profundidade da embalagem (mm)	820 mm	Peso líquido (kg)	135,000 kg
Altura da embalagem (mm)	1910 mm	Peso bruto (kg)	161,000

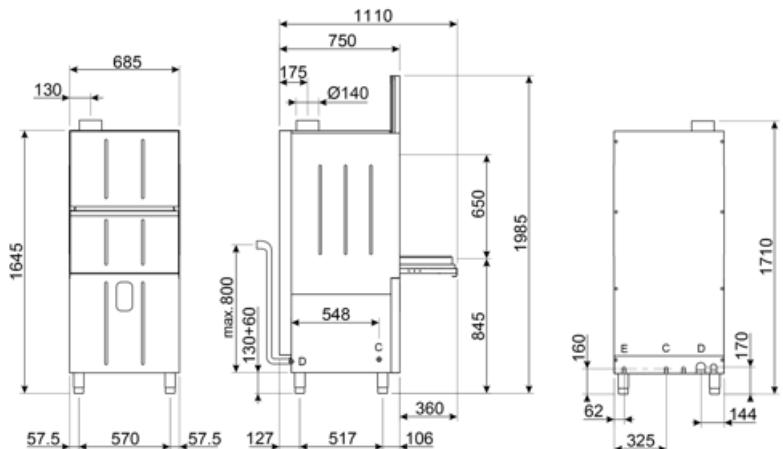

D = SCARICO 1½", VIDANGE 1½", DRAIN 1½", ABFLUSS 1½", DESAGÖE 1½", СВИД 1½"

C = CARICAMENTO ACQUA ½" GAS; CHARGEMENT EAU ½" GAZ; WATER INLET ½" GAS; ZUFUSS ½" GAS; CARGA AGUA ½" GAS; НАБОР ВОДЫ ½" GAS
E = ALLACCIMENTO ELETTRICO; BRANCHEMENT ELECTRIQUE; ELECTRIC CONNECTION; ELEKTRISCHER ANSCHLUSS; CONEXION ELECTRICA; ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Acessórios Compatíveis



WB5757G01

Universal basket with flat bottom, dim.
(WxDxH) 570x570x140 mm



WB5757T01

Stainless steel basket for 5 trays, dim.
(WxDxH) 570x570x255 mm



WB5757T02

Stainless steel basket for 8 trays, dim.
(WxDxH) 570x570x255 mm



WH00B02

Block for sac à poche



WH00S02

Basket for utensils, dim. (WxDxH)
150x150x250 mm

Symbols glossary

 SUITABLE FOR EURONORM TRAY

 SUITABLE FOR GASTRONORM
TRAY

 HTR RINSING SYSTEM

 MAX.USABLE HEIGHT 640mm

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.