

# UW60132D

Product Family	Dishwasher
Subfamily	Utensil dishwasher
Type	Utensilwasher
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
Basket dimensions	600x1320 mm
Rinse pump	HTR system
Wash pump	Standard
Default power supply	400 V 3N~ / 45 A / 18,6 kW /50 Hz



## Target

Potential users	Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Meat processing industry; Schools
-----------------	---

## Aesthetics

Led colour	Red
------------	-----

## Technical Features

Trays washing option	Yes	Detergent flow rate	1.5 l/h
Water consumption per cycle	7,5	Rinse aid flow rate	0.4 l/h
Wash temperature (min-max)	60 °C	Usable load height	860 mm
Rinse temperature (min-max)	78°C	Height with door open	2465 mm
Minimum water consumption per cycle	1,8 l	Depth with door open	1255 mm
Warm water connection	8°C	Maximum height with no-basket washing	860 mm
Max. inlet temperature	60°C	Dimensions	1450x860x2100 mm
Max water hardness	12°f - 7°dH		

## Programmes

### Program table

#### Utensil washer programs

Maximum baskets/hour

Maximum plates/hour

### Utensil washer

1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C

30

## Electrical Connection

Tank heating element power	6000 W
Boiler heating element power	12000 W
UW wash pump power	3x2200W

Default connection	18600 W
Electrical connection options	230 V~ / 78,2 A / 18 kW / 50 Hz

## Interface

Display	4 digit	On/off indicator	Yes
Number of buttons	3		

## Construction

Tank Construction	With printed base Single skinned	Filter	2-stages filter system
Tank material	Stainless steel AISI 304	Wash tank capacity	130 l
Back panel	Galvanized	Boiler capacity	17 l
Upper washing system	Two 3-arms washing and two split rinse spray arms, stainless steel	Noise level	Lpa 51,7 dBA
Lower washing system	Two 4-arms washing and two split rinse spray arms, stainless steel	Protection class	IPX4
Tank filter	Stainless steel	Adjustable feet	Yes
Rack guides	Welded	Drain max. height	950 mm

## Accessories Included

Cutlery basket	1 x WH00S02	Drain pipe	Yes - 2m
Water supply pipe	Yes - 2,5m		


## Equipment

Peristaltic detergent dispenser	Yes, manual	Water supply pipe diameter	16 mm
---------------------------------	-------------	----------------------------	-------

Peristaltic rinse-aid dispenser	Yes, manual	Drain supply pipe diameter	21.5 mm
Rinse boiler Thermostop system	Yes - default	Detergent (red) hose length	Yes, manual
Wash pump soft start system	Yes	Rinse aid (blue) hose length	Yes, manual
Break tank	Yes		

## Logistic Information


Packed width	980 mm	Dimensions of the packed product (mm)	2230X980X1560
Packaged depth	1560 mm	Net weight (kg)	335,000 kg
Height (mm) packed	2230 mm	Gross weight (kg)	376,000

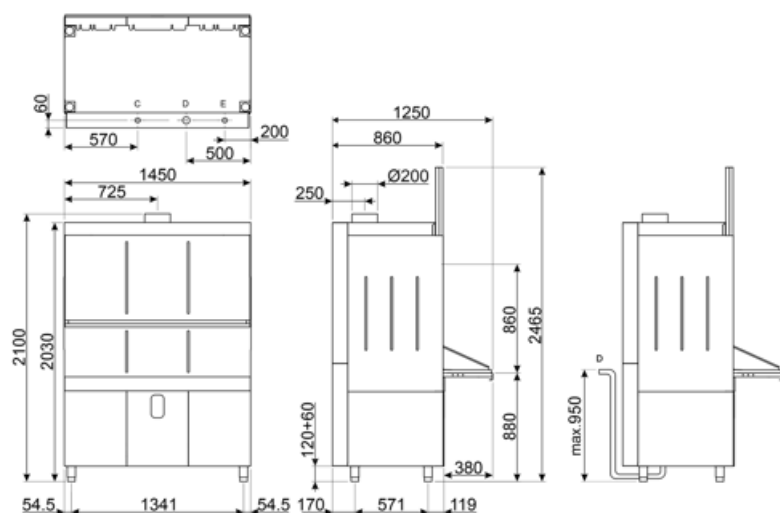

D = SCARICO 1 1/2" VIDEANGE 1 1/2", DRAIN 1 1/2", ABFLUSS 1 1/2", DÉSAGÉE 1 1/2", CIBB 1 1/2"  
C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLOSS 1/2" GAS, CARGA AGUA 1/2" GAS, HAPOP BOEH 1/2" GAS  
E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

## Compatible Accessories

---




**WB60132G02**  
Utensilwasher grid



**WB6070G01**  
Utensilwasher wire basket with flat bottom 700x600



**WH00B02**  
Block for utensilwasher saccapoche



**WH00S02**  
Basket for utensilwasher tools

## Symbols glossary

---



SUITABLE FOR EURONORM TRAY



Suitable for 1/1GN trays



HTR rinsing system



MAX.USABLE HEIGHT 850mm

---

## Benefit

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

### Wash pumps

Triple-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative triple-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.