UW60132D

Família	Máquina de lavar louça profissional
Subfamily	Utensil washer
Type	Lava utensílios
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
Double basket	No
Dimensões do cesto	600x1320 mm
Rinse pump	HTR system
Wash pump	Standard
Ligação energética	400 V 3N~ / 45 A / 18,6 kW / 50 Hz

Mercado

Industries	Hotelaria; Ristoranti / Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail

Design

Cor dos LEDs	Vermelho

Especificações técnicas

Trays washing option	Sim
Water consumption per cycle	7,5 l
Wash temperature (min-max)	60 °C
Rinse temperature (min-max)	78°C
Minimum water consumption per cycle	1,8 l
Temperatura pré-definida de ligação da água	5°C
Max. inlet temperature	60°C
Dureza máxima da água	12°f - 7°dH
Carga de detergente	1,5 l/h
Carga de enxaguamento	0,4 l/h
Altura de carga operável	860 mm
Altura de porta aberta	2465 mm
Profundidade com porta aberta	1255 mm
Altura máxima sem cesto	860 mm
Dimensões de produto LxPxA:	1450x860x2100 mm

Programas

Program table	Utensil washer
Programas de lavagem de utensílios	120" (92" a 60°C - enxaguamento 18" a 85°C); 240" (212" a 60°C - 10" pausa de escorrimento - enxaguamento 18" a 85°C); Sem fim a 60°C - 10" pausa de escorrimento - enxaguamento 18" a 85°C
Numero máximo de cestos/hora	30
Numero máximo de pratos/hora	

Ligação elétrica

Tank heating element power	6000 W	**Ligação pré-definida**	18600 W
Boiler heating element power	12000 W	**Ligação eléctrica opcional**	230 V~ / 78,2 A / 18 kW / 50 Hz
Wash pump power	3x2200W		

Interface

Display	4 digitos	**Luz indicadora On/Off**	Sim
Numero de botões	3		

ESPECIFICAÇÕES TÉCNICAS

Tank	Com base estampada	**Filter**	2-stage filter system
Tipologia	Parede única	**Capacidade da cuba**	130 l
Material da cuba	Aço Inox AISI 304	**Capacidade da caldeira**	17 l
Painel traseiro	Porta galvanizada	**Boiler type**	Artmosferic boiler
Sistema de lavagem superior	Two 3-arms wash and two split rinse spray arms, stainless steel	**Ruído**	LpA<70 dB(A)
		Classe de Proteção	IPX4
		Adjustable feet	Sim
Sistema de lavagem inferior	Two 4-arms wash and two split rinse spray arms, stainless steel	**Altura max. de drenagem**	950 mm
Filtro da cuba	Aço inox		
Guias dos cestos	Soldadas		

Acessórios incluídos

Cesto para talheres	1x WH00S02	**Mangueira de drenagem**	Sim - 2m
Mangueira de abastecimento de água	Sim - 2,5m		

Equipamentos

Peristaltic detergent dispenser	Manual	**Diâmetro do tudo de abastecimento de água**	DN15 - ½”
Peristaltic rinse-aid dispenser	Manual	**Ø do tubo de drenagem**	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	**Comprimento da mangueira de detergente (vermelha)**	2,2 m
Wash pump soft start system	Sim	**Comprimento da mangueira de enxaguamento (azul)**	2,2 m
Break tank	Sim		

Dados de logística

Largura da embalagem (mm)	980 mm	**Dimensões do produto embalado (mm)**	2230x980x1560 mm
Profundidade da embalagem (mm)	1560 mm	**Peso líquido (kg)**	335,000 kg
Altura da embalagem (mm)	2230 mm	**Peso bruto (kg)**	376,000 kg

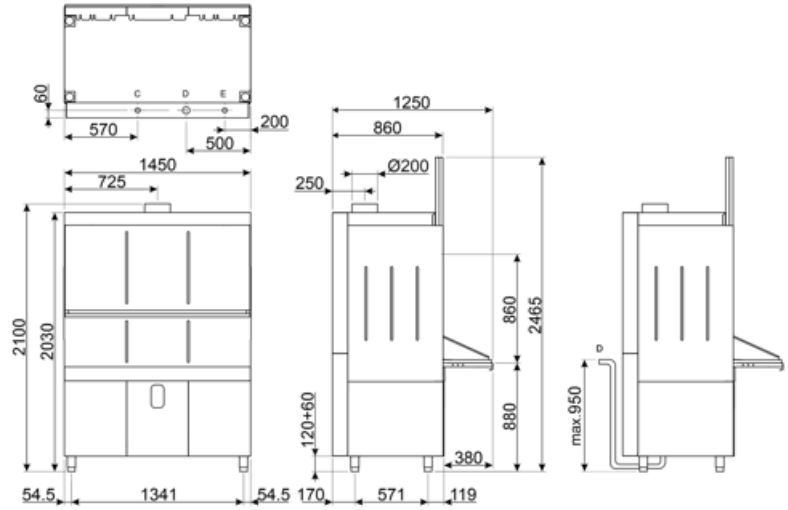

D = SCARICO 1½", VIDANGE 1½", DRAIN 1½"; ABFLUSS 1½"; DESAGÜE 1½"; СЛИВ 1½"
C = CARICAMENTO ACQUA ½" GAS, CHARGEMENT EAU ½" GAZ; WATER INLET ½" GAS; ZUFLUSS ½" GAS; CARGA AGUA ½" GAS; НАБОР ВОДЫ ½" GAS
E = ALLACCIAMENTO ELETTRICO; BRANCHEMENT ELECTRIQUE; ELECTRIC CONNECTION; ELEKTRISCHER ANSCHLUSS; CONEXION ELECTRICA; ЭЛЕКТРИЧЕСКОЕ ПОДСОЕДИНЕНИЕ

Acessórios Compatíveis



WB60132G02

Utensilwasher grid, dim. (WxDxH) 1320x600 mm

WB6070G01

Universal basket with flat bottom, dim. (WxDxH) 700x600x305 mm

WH00B02

Block for sac à poche

WH00S02

Basket for utensils, dim. (WxDxH) 150x150x250 mm

Symbols glossary

SUITABLE FOR EURONORM TRAY

SUITABLE FOR GASTRONORM TRAY

HTR RINSING SYSTEM

MAX.USABLE HEIGHT 850mm

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Wash pumps

Triple-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative triple-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.