

# UW60132DPS

<b>Product Family</b>	Dishwasher
<b>Subfamily</b>	Utensil dishwasher
<b>Type</b>	Utensilwasher
<b>Crockery</b>	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
<b>Basket dimensions</b>	600x1320 mm
<b>Rinse pump</b>	HTR system
<b>Wash pump</b>	Standard
<b>Default power supply</b>	400 V 3N~ / 45 A / 18,6 kW / 50 Hz



## Target

<b>Industries</b>	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail
-------------------	---

## Aesthetics

<b>Led colour</b>	Red
-------------------	-----

## Technical Features

<b>Trays washing option</b>	Yes	<b>Detergent flow rate</b>	1.5 l/h
<b>Water consumption per cycle</b>	7,5	<b>Rinse aid flow rate</b>	0.4 l/h
<b>Wash temperature (min-max)</b>	60 °C	<b>Usable load height</b>	850 mm
<b>Rinse temperature (min-max)</b>	78°C	<b>Height with door open</b>	2430 mm
<b>Minimum water consumption per cycle</b>	1,8 l	<b>Depth with door open</b>	1255 mm
<b>Warm water connection</b>	8°C	<b>Maximum height with no-basket washing</b>	860 mm
<b>Max. inlet temperature</b>	60°C	<b>Dimensions</b>	1450x865x2100 mm
<b>Max water hardness</b>	12°F - 7°dH		

## Programmes

### Program table

#### Utensil washer programs

Maximum baskets/hour

Maximum plates/hour

### Utensil washer

1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C

30

## Electrical Connection

Tank heating element power 6000 W

Boiler heating element power 12000 W

UW wash pump power 3x2200W

Default connection 18600 W

Electrical connection options 230 V~ / 78,2 A / 18 kW / 50 Hz

## Interface

Display 4 digit

Number of buttons 3

On/off indicator Yes

## Construction

Tank With printed base

Construction Single skinned

Tank material Stainless steel AISI 304

Back panel Galvanized

Upper washing system Two 3-arms washing and two split rinse spray arms, stainless steel

Lower washing system Two 4-arms washing and two split rinse spray arms, stainless steel

Tank filter Stainless steel

Rack guides Welded

Filter 2-stages filter system

Wash tank capacity 130 l

Boiler capacity 17 l

Boiler type Artmosferic boiler

Noise level Lpa 51,7 dBA

Protection class IPX4

Adjustable feet Yes

Drain max. height 950 mm

## Accessories Included

Cutlery basket 1 x WH00S02

Water supply pipe Yes - 2,5m

Drain pipe Yes - 2m


## Equipment

Drain pump Yes

Peristaltic detergent dispenser	Yes, manual	Partial water exchange in the wash tank via built-in drain pump	Yes
Peristaltic rinse-aid dispenser	Yes, manual	Water supply pipe diameter	16 mm
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	21.5 mm
Wash pump soft start system	Yes	Detergent (red) hose length	Yes, manual
Break tank	Yes	Rinse aid (blue) hose length	Yes, manual

## Logistic Information

Packed width	1560 mm	Dimensions of the packed product (mm)	2230X1560X980
Packaged depth	980 mm	Net weight (kg)	335,000 kg
Height (mm) packed	2230 mm	Gross weight (kg)	376,000

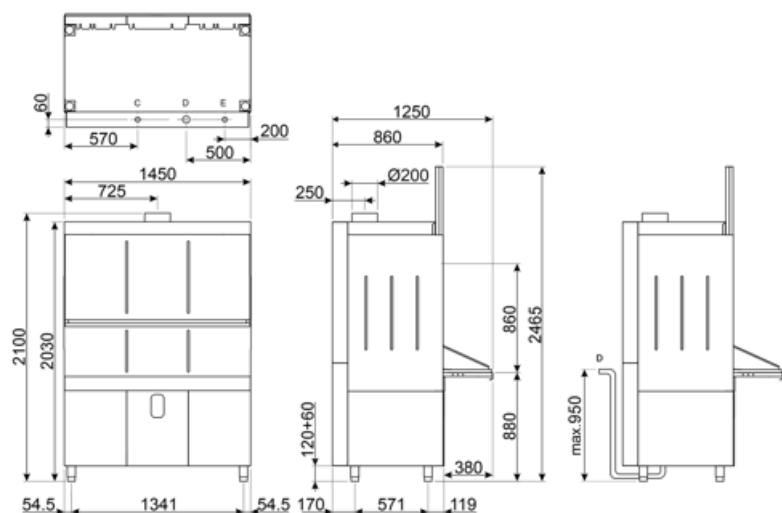


D = SCARICO 1 1/2", VIDEANGE 1 1/2", DRAIN 1 1/2", ABFLUSS 1 1/2", DESAGÜE 1 1/2", CIBIB 1 1/2"

C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFUSS 1/2" GAS, CARGA AGUA 1/2" GAS, HÁROP BOBIM 1/2" GAS

E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ÉLECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

## Compatible Accessories

---




**WB60132G02**  
Utensilwasher grid



**WB6070G01**  
Utensilwasher wire basket with flat bottom 700x600



**WH00B02**  
Block for utensilwasher saccapoche



**WH00S02**  
Basket for utensilwasher tools

## Symbols glossary

---



SUITABLE FOR EURONORM TRAY



Suitable for 1/1GN trays



HTR rinsing system



MAX.USABLE HEIGHT 850mm

---

## Benefit

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

---

## **Wash pumps**

Triple-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative triple-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.