

# UW60132DPS

<b>Product Family</b>	Dishwasher
<b>Subfamily</b>	Utensilwasher
<b>Type</b>	Utensil dishwasher
<b>Crockery</b>	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
<b>Basket dimensions</b>	600x1320 mm
<b>Rinse pump</b>	HTR system
<b>Wash pump</b>	Standard
<b>Default power supply</b>	400 V 3N~ / 45 A / 18,6 kW / 50 Hz
<b>Dimensions</b>	1450x865x2100 mm



## Target

<b>Industries</b>	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Food Industries; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens
-------------------	---

## Aesthetics

<b>Led colour</b>	Red
-------------------	-----

## Technical Features

<b>Trays washing option</b>	Yes	<b>Detergent flow rate</b>	1.5 l/h
<b>Water consumption per cycle</b>	7,5 l	<b>Rinse aid flow rate</b>	0.4 l/h
<b>Wash temperature (min-max)</b>	60 °C	<b>Usable load height</b>	860 mm
<b>Rinse temperature (min-max)</b>	78°C	<b>Height with door open</b>	2430 mm
<b>Warm water connection</b>	8°C	<b>Depth with door open</b>	1255 mm
<b>Max. inlet temperature</b>	60°C	<b>Maximum height with no-basket washing</b>	860 mm
<b>Max water hardness</b>	12°f - 7°dH		

## Programmes

## Program table

### Utensil washer programs

### Maximum baskets/hour

### Maximum plates/hour

Utensil washer

1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C

30

## Electrical Connection

Tank heating element power	6000 W	Default connection	18600 W
Boiler heating element power	12000 W	Electrical connection options	230 V~ / 78,2 A / 18 kW / 50 Hz
UW wash pump power	3x2200W	Plug	No

## Interface

Display	4 digit	On/off indicator	Yes
Number of buttons	3		

## Construction

Tank	With printed base	Filter	2-stages filter system
Construction	Single skinned	Wash tank capacity	130 l
Tank material	Stainless steel AISI 304	Boiler capacity	17 l
Back panel	Galvanized	Boiler type	Artmosferic boiler
Upper washing system	Two 3-arms washing and two split rinse spray arms, stainless steel	Noise level	Lpa 51,7 dBA
Lower washing system	Two 4-arms washing and two split rinse spray arms, stainless steel	Protection class	IPX4
Tank filter	Stainless steel	Adjustable feet	Yes
Rack guides	Welded	Drain max. height	950 mm

## Accessories Included

Water supply pipe	Yes - 2,5m	Drain pipe	Yes - 2m
-------------------	------------	------------	----------


## Equipment

Drain pump	Yes	Partial water exchange in the wash tank via built-in drain pump	Yes
Peristaltic detergent dispenser	Yes, manual	Water supply pipe diameter	16 mm
Peristaltic rinse-aid dispenser	Yes, manual	Drain supply pipe diameter	21.5 mm
Rinse boiler Thermostop system	Yes - default		

Wash pump soft start system	Yes	Detergent (red) hose length	Yes, manual
Break tank	Yes	Rinse aid (blue) hose length	Yes, manual

## Logistic Information

EAN code	8017709281779	Net weight (kg)	335.000 kg
Packed product dimensions (WxDxH)	2230x1560x980 mm	Gross weight (kg)	376.000 kg

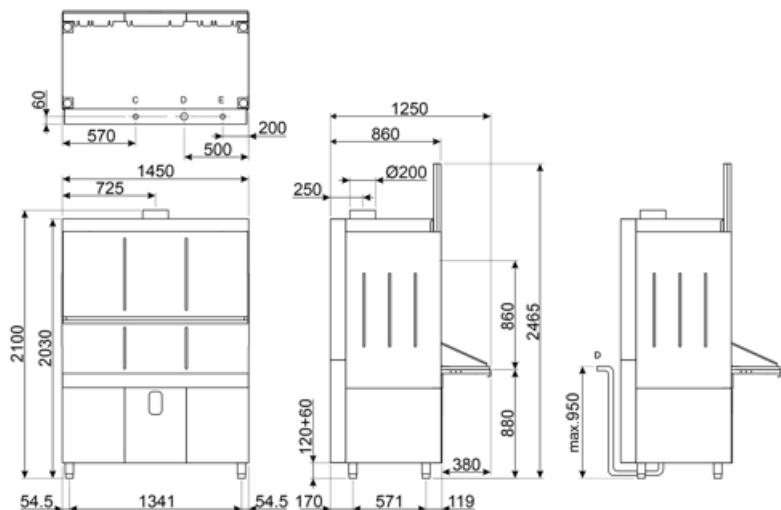

D = SCARICO 1½"; VIDANGE 1½"; DRAIN 1½"; ABFLUSS 1½"; DESAGÜE 1½"; СВЫХ 1½"

C = CARICAMENTO ACQUA ½" GAS; CHARGEMENT EAU ½" GAZ; WATER INLET ½" GAS; ZIEFLUSS ½" GAS; CARGA AGUA ½" GAS; НАБОР ВОДЫ ½" GAS

E = ALLACCIMENTO ELETTRICO; BRANCHEMENT ELECTRIQUE; ELECTRIC CONNECTION; ELEKTRISCHER ANSCHLUSS; CONEXION ELECTRICA; ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

---

## Compatible Accessories

---



**WB60132G02**

Utensillwasher grid




**WB6070G01**

Utensilwasher wire basket with flat bottom 700x600



**WH00B02**

Block for utensilwasher saccapoché



**WH00S02**

Basket for utensilwasher tools

---

## Symbols glossary

---

 **SUITABLE FOR EURONORM TRAY**

 **Suitable for 1/1GN trays**

 **HTR rinsing system**

 **MAX.USABLE HEIGHT 850mm**

## Benefit

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

## Wash pumps

Triple-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative triple-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.