

UW60132DPS

Product Family	Dishwasher
Subfamily	Utensilwasher
Type	Utensil dishwasher
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
Basket dimensions	600x1320 mm
Rinse pump	HTR system
Wash pump	Standard
Default power supply	400 V 3N~ / 45 A / 18,6 kW / 50 Hz
Dimensions	1450x865x2100 mm



Target

Industries	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Food Industries; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens
-------------------	--

Aesthetics

Led colour	Red
-------------------	-----

Technical Features

Trays washing option	Yes	Detergent flow rate	1.5 l/h
Water consumption per cycle	7,5 l	Rinse aid flow rate	0.4 l/h
Wash temperature (min-max)	60 °C	Usable load height	860 mm
Rinse temperature (min-max)	78°C	Height with door open	2430 mm
Min. water connection temperature	8°C	Depth with door open	1255 mm
Max. inlet temperature	60°C	Maximum height with no-basket washing	860 mm
Max water hardness	8°f-5dh / 14°f-8dh		

Programmes

Program table
Utensil washer programs

Utensil washer
1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C

Maximum baskets/hour
Maximum plates/hour

30

Electrical Connection

Tank heating element power 6000 W
Boiler heating element power 12000 W
UW wash pump power 3x2200W

Default connection 18600 W
Electrical connection options 230 V~ / 78,2 A / 18 kW / 50 Hz
Plug No

Interface

Display 4 digit
Number of buttons 3

On/off indicator Yes

Construction

Tank Construction With printed base
Tank material Single skinned
Back panel Stainless steel AISI 304
Upper washing system Galvanized
Two 3-arms washing and two split rinse spray arms, stainless steel
Lower washing system Two 4-arms washing and two split rinse spray arms, stainless steel
Tank filter Stainless steel
Rack guides Welded

Filter 2-stages filter system
Wash tank capacity 130 l
Boiler capacity 17 l
Boiler type Atmospheric boiler
Noise level Lpa 51,7 dBA
Protection class IPX4
Adjustable feet Yes
Drain max. height 950 mm

Accessories Included

Water supply pipe Yes - 2,5m

Drain pipe Yes - 2m

Equipment


Drain pump Yes
Peristaltic detergent dispenser Yes, manual

Partial water exchange in the wash tank via built-in drain pump Yes

Peristaltic rinse-aid dispenser	Yes, manual	Water supply pipe diameter	DN15 - ½"
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	DN20-G 3/4"
Wash pump soft start system	Yes	Detergent (red) hose length	2,2 m
Break tank	Yes	Rinse aid (blue) hose length	2,2 m


Logistic Information

EAN code	8017709281779	Net weight (kg)	335,000 kg
Packed product dimensions (WxDxH)	2230x1560x980 mm	Gross weight (kg)	376,000 kg

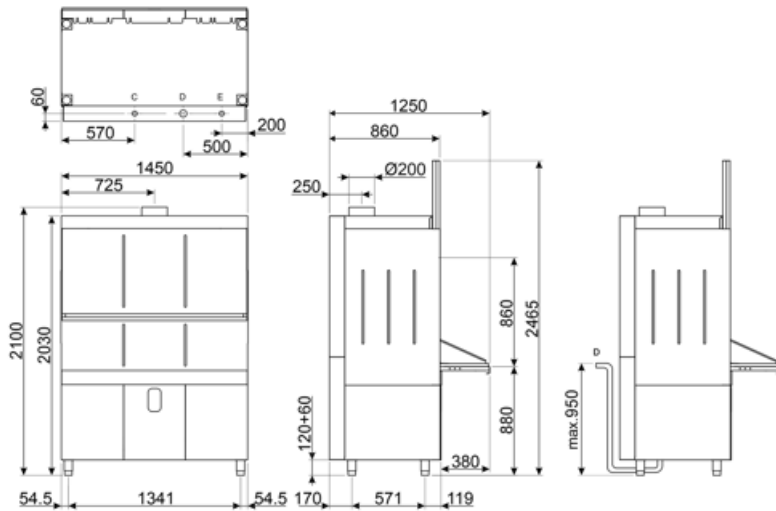

D = SCARICO 1½", VIDEANGE 1½", DRAIN 1½", ABFLUSS 1½", DESAGÛE 1½", CIBIB 1½"
 C = CARICAMENTO ACQUA ½" GAS, CHARGEMENT EAU ½" GAZ, WATER INLET ½" GAS, ZUFUSS ½" GAS, CARGA AGUA ½" GAS, НАПОЛНЕНИЕ ½" GAS
 E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Compatible Accessories




WB60132G02
Utensilwasher grid



WB6070G01
Utensilwasher wire basket with flat
bottom 700x600



WH00B02
Block for utensilwasher saccapoche



WH00S02
Basket for utensilwasher tools

Benefit

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Wash pumps

Triple-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative triple-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.