

# UW60132DPS

Family	Professional dishwasher
Subfamily	Utensil washer
Type	Utensilwasher
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
Basket dimensions	600x1320 mm
Rinse pump	HTR system
Wash pump	Standard
Power connection	400 V 3N~ / 45 A / 18,6 kW / 50 Hz



## Target

Solutions	Restaurants/Pubs; Frozen bakery industry; Other food industry; Catering and Institutions
-----------	--

## Aesthetics

Led color	Red
-----------	-----

## Technical Features

Trays washing option	Yes	Detergent load	1,5 l/h
Water consumption per cycle	7,5	Rinse load	0,4 l/h
Wash temperature (min-max)	60 °C	Usable load height	850 mm
Rinse temperature (min-max)	78°C	Height open door	2430 mm
Minimum water consumption per cycle	1,8 l	Depth with open door	1255 mm
Min. water connection temperature	5°C	Maximum height no-basket wash	860 mm
Max. inlet temperature	60°C	Product dimensions WxDxH	1450x865x2100 mm
Max water hardness	12°f - 7°dH		

## Programs

## Program table

Utensil washers programs

Maximum basket/hour

Maximum dishes/hour

Utensil washer

Short - 2"; Long - 4"; Endless

30

## Electrical Connection

Plug Not present

Tank heating element power 6000 W

Boiler heating element power 12000 W

Wash pump power 3x2200W

Default connection 18600 W

Optional electrical connection 230 V~ / 78,2 A / 18 kW / 50 Hz

## Interface

Display 4 digit

Number of buttons 3

On/Off button Yes

## Construction

Tank With printed base

Construction Single-skin

Tank material Stainless steel AISI 304

Back panel Galvanized

Upper wash system Two 3-arms wash and two split rinse spray arms, stainless steel

Lower wash system Two 4-arms wash and two split rinse spray arms, stainless steel

Tank filter Stainless steel

Rack guides Welded

Filter 2-stage filter system

Tank capacity 130 l

Boiler capacity 17 l

Noise LpA<70 dB(A)

Protection class IPX4

Adjustable feet Yes

Drain max. height 950 mm

## Accessories included

Cutlery basket 1x WH00S02

Water supply hose Yes - 2,5m

Drain hose Yes - 2m

## Equipments

Drain pump Yes

Peristaltic detergent dispenser Manual

Peristaltic rinse-aid dispenser Manual

Rinse boiler Thermostop system Yes - default

Partial renewal of water in the tank and built-in drain pump Yes


Water supply pipe diameter DN15 - ½"

Drain supply pipe diameter DN20-G 3/4"

Wash pump soft start system	Yes	Detergent (red) hose lenght	2,2m
Break tank	Yes	Rinse aid (blue) hose lenght	2,2m

## Logistic Information


Width packed product	1560 mm	Packed product dimensions	2230X1560X980
Depth packed product	980 mm	Net weight	335,000 kg
Height packed product	2230 mm	Gross weight (kg)	376,000

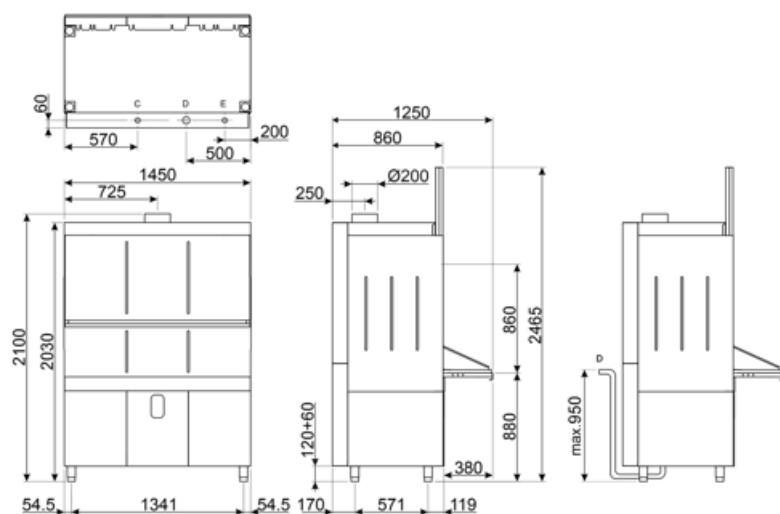

D = SCARICO 1 1/2", VIDEANGE 1 1/2", DRAIN 1 1/2", ABFLUSS 1 1/2", DESAGÉE 1 1/2", CIBB 1 1/2"  
C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLUSS 1/2" GAS, CARGA AGUA 1/2" GAS, НАПОЛ БОДЫ 1/2" GAS  
E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

## Compatible Accessories

---



### **WB60132G02**

Utensilwasher grid, dim. (WxDxH)  
1320x600 mm




### **WB6070G01**

Universal basket with flat bottom,  
dim. (WxDxH) 700x600x305 mm



### **WH00B02**

Block for sac à poche



### **WH00S02**

Basket for utensils, dim. (WxDxH)  
150x150x250 mm

## Symbols glossary

---



SUITABLE FOR EURONORM TRAY



SUITABLE FOR GASTRONORM  
TRAY



HTR RINSING SYSTEM



MAX.USABLE HEIGHT 850mm

## Benefit (TT)

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

### **Wash pumps**

Triple-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative triple-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.