

UW60132DPS

Family	Professional dishwasher
Subfamily	Utensil washer
Type	Utensil washer
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
Basket dimensions	600x1320 mm
Rinse pump	HTR system
Wash pump	Standard
Power connection	400 V 3N~ / 45 A / 18,6 kW / 50 Hz
Product dimensions (WxDxH)	1450x865x2100 mm



Target

Industries	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail
-------------------	---

Aesthetics

Led color	Red
------------------	-----

Technical Features

Trays washing option	Yes	Detergent load	1,5 l/h
Water consumption per cycle	7,5 l	Rinse load	0,4 l/h
Wash temperature (min-max)	60 °C	Usable load height	860 mm
Rinse temperature (min-max)	78°C	Height open door	2430 mm
Min. water connection temperature	5°C	Depth with open door	1255 mm
Max. inlet temperature	60°C	Maximum height no-basket wash	860 mm
Max. water hardness	12°f - 7°dH		

Programs

Program table	Utensil washer
Utensil washers programs	Short - 2"; Long - 4"; Endless
Maximum basket/hour	30
Maximum dishes/hour	

Electrical Connection

Tank heating element power	6000 W	Default connection	18600 W
Boiler heating element power	12000 W	Optional electrical connection	230 V~ / 78,2 A / 18 kW / 50 Hz
Wash pump power	3x2200W	Plug	Not present

Interface

Display	4 digit	On/Off button	Yes
Number of buttons	3		

Construction

Tank	With printed base	Filter	2-stage filter system
Construction	Single-skin	Tank capacity	130 l
Tank material	Stainless steel AISI 304	Boiler capacity	17 l
Back panel	Galvanized	Boiler type	Artmosferic boiler
Upper wash system	Two 3-arms wash and two split rinse spray arms, stainless steel	Noise	LpA<70 dB(A)
Lower wash system	Two 4-arms wash and two split rinse spray arms, stainless steel	Protection class	IPX4
Tank filter	Stainless steel	Adjustable feet	Yes
Rack guides	Welded	Drain max. height	950 mm

Accessories included

Water supply hose	Yes - 2,5 m	Drain hose	Yes - 2m
--------------------------	-------------	-------------------	----------


Equipments

Drain pump	Yes	Partial renewal of water in the tank and built-in drain pump	Yes
Peristaltic detergent dispenser	Manual	Water supply pipe diameter	DN15 - 1/2"

Peristaltic rinse-aid dispenser	Manual	Drain supply pipe diameter	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	Detergent (red) hose lenght	2,2 m
Wash pump soft start system	Yes	Rinse aid (blue) hose lenght	2,2 m
Break tank	Yes		

Logistic Information


EAN code	8017709281779	Net weight	335,000 kg
Packed product dimensions (WxDxH)	2230x1560x980 mm	Gross weight	376,000 kg

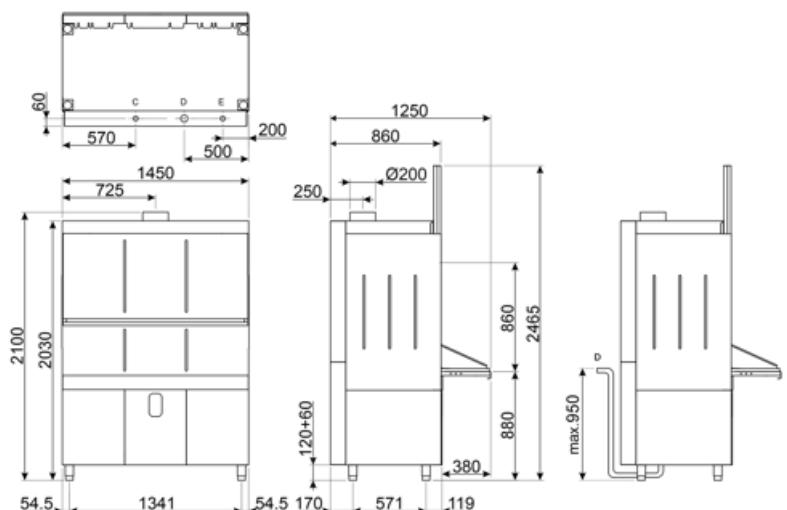

D = SCARICO 1½"; VIDANGE 1½"; DRAIN 1½"; ABFLUSS 1½"; DESAGÜE 1½"; СВАБ 1½"

C = CARICO/MENTO ACQUA ½" GAS; CHARGEMENT EAU ½" GAZ; WATER INLET ½" GAS; ZUFLUSS ½" GAS; CARGA AGUA ½" GAS; НАБОР БОЛЫМ ½" GAS
 E = ALLACCIMENTO ELETTRICO; BRANCHEMENT ELECTRIQUE; ELECTRIC CONNECTION; ELEKTRISCHER ANSCHLUSS; CONEXION ELECTRICA; ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Compatible Accessories



WB60132G02

Utensilwasher flat grid, dim. (WxDxH)
1320x600 mm




WB6070G01

Universal basket with flat bottom,
dim. (WxDxH) 700x600x305 mm



WH00B02

Block for sac à poche



WH00S02

Basket for utensils, dim. (WxDxH)
150x150x250 mm

Symbols glossary

 **SUITABLE FOR EURONORM TRAY**

 **SUITABLE FOR GASTRONORM TRAY**

 **HTR RINSING SYSTEM**

 **MAX.USABLE HEIGHT 850mm**

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Wash pumps

Triple-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative triple-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.