

UW6070D

Family Professional dishwasher

Subfamily Utensil washer Type Utensil washer

Crockery Crockery; Cutlery; EN 600x400 trays;

GN1/1 trays; Utensils

Basket dimensions600x700 mmRinse pumpHTR systemWash pumpStandard

Power connection 400 V 3N~ / 31,7 A / 12,7 kW / 50 Hz



Target

Industries Hotels; Ristoranti /

Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities; Commercial food services; Grocery shops /

Food retail

Aesthetics

Led color Red

Technical Features

Trays washing option Yes Water consumption per 61

cycle

Wash temperature 60 °C

(min-max)

Rinse temperature (min- 78°C

max)

Minimum water 1,81

consumption per cycle

Min. water connection

temperature

Max. inlet temperature 60°C

Max water hardness 12°f - 7°dH

5°C

Detergent load Rinse load

Usable load height Height open door Depth with open door

Maximum height nobasket wash

Product dimensions

WxDxH

1,5 l/h

0,4 l/h 860 mm 2465 mm

1255 mm 860 mm

800x860x2100 mm



Programs

Program table

Utensil washers programs Maximum basket/hour Maximum dishes/hour

Utensil washer

Short - 2"; Long - 4"; Endless

30

Electrical Connection

Tank heating element

power

Boiler heating element

power

Wash pump power

4500 W

9000 W

1x2200W and 1x1500W

Default connection

Optional electrical connection

Plug

12700 W

230 V 3~ / 55,2 A / 12,7 kW

/ 50 Hz Not present

Interface

Display Number of buttons 4 digit

3

On/Off button

Yes

Construction

Tank

Construction

Tank material

Back panel

Upper wash system

Sinale-skin Stainless steel AISI 304

Galvanized

A 3-arms wash and one split rinse spray arms,

stainless steel

With printed base

Lower wash system

A 4-arms wash and one split rinse spray arms, stainless steel; One single sideways wash and rinse spray arms, stainless steel

Tank filter

Rack guides

Stainless steel

Welded

Filter

Tank capacity **Boiler** capacity Boiler type

Noise

Protection class Adjustable feet Drain max. height 2-stage filter system

70 I 17 I

Artmosferic boiler LpA<70 dB(A)

IPX4 Yes 950 mm

Accessories included

Cutlery basket Flat basket

1x WH00S02 1x WB6070G01 Water supply hose Drain hose

Yes - 2,5 m Yes - 2m

Equipments

Peristaltic detergent dispenser

Manual

Water supply pipe diameter

DN15 - 1/2"



Peristaltic rinse-aid dispenser	Manual	Drain supply pipe diameter	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	Detergent (red) hose lenght	2,2 m
Wash pump soft start system	Yes	Rinse aid (blue) hose lenght	2,2 m
Break tank	Yes		

Logistic Information

Width packed product 1040 mm


Depth packed product 910 mm

Height packed product 2230 mm

Packed product 2230x1040x910 mm dimensions

Net weight 244.000 kg

Gross weight 275.000 kg

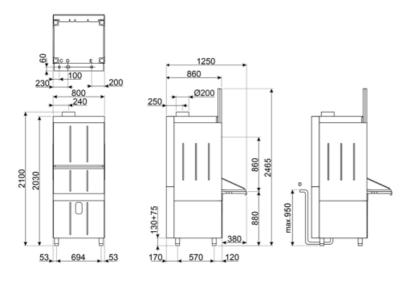

D - SCARICO 1%, VEDANGE 1%, DEAN 1½, ABFLUSS 1½, DESAGÜE 1½, CIUB 1½.

C - CARICAMENTO ACQUA 5° GAS, CHARGEMENT EAU 3° GAZ, WATER ENLET 5° GAS, ZUFLUSS 5° GAS, CARGA AGUA 5° GAS, HARGP BOXID 5° GAS
E - ALLACCIAMENTO ELETTRICO, BRANCHEMENT. ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHEUSS, CONEXION ELECTRICA; SHEKTPPHECKOE DOJBCHOPHERHE



Compatible Accessories



WB6070G01

Universal basket with flat bottom, dim. (WxDxH) 700x600x305 mm



WH00B02

Block for sac à poche





Basket for utensils, dim. (WxDxH) 150x150x250 mm



Symbols glossary

SUITABLE FOR EURONORM TRAY



SUITABLE FOR GASTRONORM TRAY TRAY



MAX.USABLE HEIGHT 850mm



Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Wash pumps

Double-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative double-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.



Side spray wash

Equipped with lateral washing arms to reach even the most difficult corners

The washing system is equipped with lateral washing arms designed to ensure complete coverage, reaching every corner and ensuring that no surface is left uncovered. Thanks to this advanced technology, even baskets and large items are treated with thorough and impeccable cleaning, removing all traces of dirt and ensuring excellent results at every stage of the washing process.