

UW6070D

Família	Máquina de lavar louça profissional
Subfamília	Lava utensílios
Dimensões do cesto	600x700 mm
Rinse pump	HTR system
Wash pump	Standard
Ligação energética	400 V 3N~ / 31,7 A / 12,7 kW / 50 Hz



Mercado

Soluções	Hotelaria; Restaurantes/ Pubs; Padarias e pastelarias; Indústria de comida congelada; Retalho alimentar; Outras indústrias de comida; Catering e cantinas; QSR
----------	--

Design

Design	Utensil washer	Cor dos LEDs	Vermelho
--------	----------------	--------------	----------

Especificações técnicas

Trays washing option	Sim	Carga de enxaguamento	0,4 l/h
Water consumption per cycle	6 l	Altura de carga operável	860 mm
Minimum water consumption per cycle	1,8 l	Altura de porta aberta	2465 mm
Temperatura pré-definida de ligação da água	5°C	Profundidade com porta aberta	1255 mm
Max. inlet temperature	60°C	Altura máxima sem cesto	860 mm
Dureza máxima da água	12°F - 7°dH	Dimensões de produto LxPxA:	800x860x2100 mm
Carga de detergente	1,5 l/h		

Programas

Program table

Programas de lavagem de utensílios

Utensil washer

120" (92" a 60°C - enxaguamento 18" a 85°C); 240" (212" a 60°C - 10" pausa de escorrimento - enxaguamento 18" a 85°C); Sem fim a 60°C - 10" pausa de escorrimento - enxaguamento 18" a 85°C

Numero máximo de cestos/hora

30

Numero máximo de pratos/hora

Ligação elétrica

Tank heating element power	4500 W
Boiler heating element power	9000 W
Wash pump power	1x2200W e 1x1500W

Ligação pré-definida	12700 W
Ligação eléctrica opcional	230 V 3~ / 55,2 A / 12,7 kW / 50 Hz

Interface

Display	4 dígitos	Luz indicadora On/Off	Sim
Numero de botões	3		

ESPECIFICAÇÕES TÉCNICAS

Tank	Com base estampada	Filter	2-stage filter system
Tipologia	Parede única	Capacidade da cuba	70 l
Material da cuba	Aço Inox AISI 304	Capacidade da caldeira	17 l
Painel traseiro	Porta galvanizada	Ruído	LpA<70 dB(A)
Sistema de lavagem superior	A 3-arms wash and one split rinse spray arms, stainless steel	Classe de Proteção	IPX4
Sistema de lavagem inferior	A 4-arms wash and one split rinse spray arms, stainless steel; One single sideways wash and rinse spray arms, stainless steel	Adjustable feet	Sim
Filtro da cuba	Aço inox	Altura max. de drenagem	950 mm
Guias dos cestos	Soldadas		

Acessórios incluídos

Cesto para talheres	1x WH00S02	Mangueira de abastecimento de água	Sim - 2,5m
Cesto de fundo plano	1x WB6070G01	Mangueira de drenagem	Sim - 2m


Equipamentos

Peristaltic detergent dispenser	Manual	Diâmetro do tudo de abastecimento de água	DN15 - ½"
		Ø do tubo de drenagem	DN20-G 3/4"

Peristaltic rinse-aid dispenser	Manual	Comprimento da mangueira de detergente (vermelha)	2,2m
Rinse boiler Thermostop system	Yes - default	Comprimento da mangueira de enxaguamento (azul)	2,2m
Wash pump soft start system	Sim		
Break tank	Sim		

Dados de logística

Largura da embalagem (mm)	1040 mm	Dimensões do produto embalado (mm)	2230X1040X910
Profundidade da embalagem (mm)	910 mm	Peso líquido (kg)	244.000 kg
Altura da embalagem (mm)	2230 mm	Peso bruto (kg)	275.000

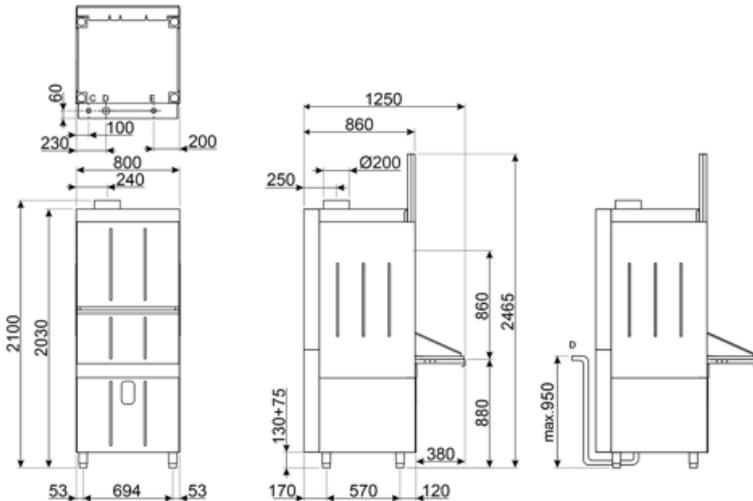

D = SCARICO 1/2", VIDANGE 1/2", DRAIN 1/2", ABFLUSS 1/2", DÉGÂGE 1/2", CIBB 1/2"

C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLUSS 1/2" GAS, CARGA AGUA 1/2" GAS, НАСОС ВОДЫ 1/2" GAS

E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Acessórios Compatíveis




WB6070G01

Universal basket with flat bottom, dim.
(WxDxH) 700x600x305 mm



WH00B02

Block for sac à poche



WH00S02

Basket for utensils, dim. (WxDxH)
150x150x250 mm

Symbols glossary



SUITABLE FOR EURONORM TRAY



SUITABLE FOR GASTRONORM
TRAY



MAX.USABLE HEIGHT 850mm

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Wash pumps

Double-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative double-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.

Side spray wash

Equipped with lateral washing arms to reach even the most difficult corners

The washing system is equipped with lateral washing arms designed to ensure complete coverage, reaching every corner and ensuring that no surface is left uncovered. Thanks to this advanced technology, even baskets and large items are treated with thorough and impeccable cleaning, removing all traces of dirt and ensuring excellent results at every stage of the washing process.