

UW6070DPS

Familia	Lavavajillas
Subfamilia	Lavaobjetos
Line	Lavavajillas para utensilios
Dimensiones de la cesta	600x700 mm
Rinse pump	HTR system
Wash pump	Standard
Conexión eléctrica	400 V 3N~ / 18 kW /50 Hz



Equipo accesorios incluidos

Cesta de cubiertos	1 x WH00S02	Tubería de suministro de agua	Si - 2,5m
Cesta plana	WB6070G01	Tubo de desagüe	Si - 2m

Distribución

Usuarios potenciales	Hoteles; Restaurantes - Pubs; Panaderías - Pastelerías; Industria de panadería congelada; Comercio minorista de alimentos; Otra industria alimentaria; catering e Instituciones; QSR
-----------------------------	---

Programas

Lavaobjetos	1- 120" (92" a 60°C - 18" a 85°C); 2- 240" (212" a 60°C - 10" goteo 18" a 85°C); 3- Infinito a 60°C - 10" goteo - 18" a 85°C
Máximo cesto / hora	30
Máximo platos / hora	

Interface

Pantalla	4 dígitos	Botón ON/OFF	Sí
-----------------	-----------	---------------------	----

Número de botones 3

Construcción

Cuba	Con base impresa	Guías de estante	Soldadas
Construcción de la cuba	Mono pared	Bomba de desagüe	2-stage filter system
Material de la cuba	Acero inoxidable AISI 304	Capacidad de la cuba	70 l
Panel trasero	Galvanizado	Volumen del calderín	17 l
Upper wash system	Un brazo rociador para lavado de 3 brazos y un brazo rociador para aclarado, de acero inoxidable.	Clase de protección	IPX4
		Adjustable feet	Sí
		Profundidad de carga	950 mm
Lower wash system	Un brazo rociador para lavado de 4 brazos y un brazo rociador dividido para aclarado, de acero inoxidable.; Un brazo rociador lateral único para lavado y aclarado, de acero inoxidable.		
Filtro de la cuba	Acero inoxidable		

Características técnicas

Trays washing option	Sí	Dosificador de detergente peristáltico	Si, manual
Water consumption per cycle	6 l	Altura útil de carga	850 mm
Minimum water consumption per cycle	1,8 l	Altura puerta abierta	2465 mm
Entrada de agua	5°C	Profundidad puerta abierta	1255 mm
Max. inlet temperature	60°C	Altura máxima sin cesta de lavado	860 mm
Dureza máxima del agua	12°F - 7°dH	Product dimensions WxDxH	800x860x2100 mm
Dosificador de detergente peristáltico	Si, manual		


Conexión eléctrica

Tank heating element power	4500 W	Conexión por defecto	12700 W
Boiler heating element power	9000 W	Opción de conexión eléctrica	230 V 3~ / 18 kW / 50 Hz
Wash pump power	Blanco		

Equipamiento

Bomba de desagüe	Sí
------------------	----

Peristaltic detergent dispenser	Sí, manual	Renovación parcial del agua en el tanque e incorporación bomba de drenaje	Sí
Peristaltic rinse-aid dispenser	Sí, manual	Diámetro del tubo de entrada de agua	Si - 1,5m
Rinse boiler Thermostop system	Yes - default	Diámetro del tubo de desagüe	Si - 2m
Wash pump soft start system	Sí	Dosificador de detergente peristáltico	Si, manual
Tanque de rotura	Sí	Dosificador de detergente peristáltico	Si, manual

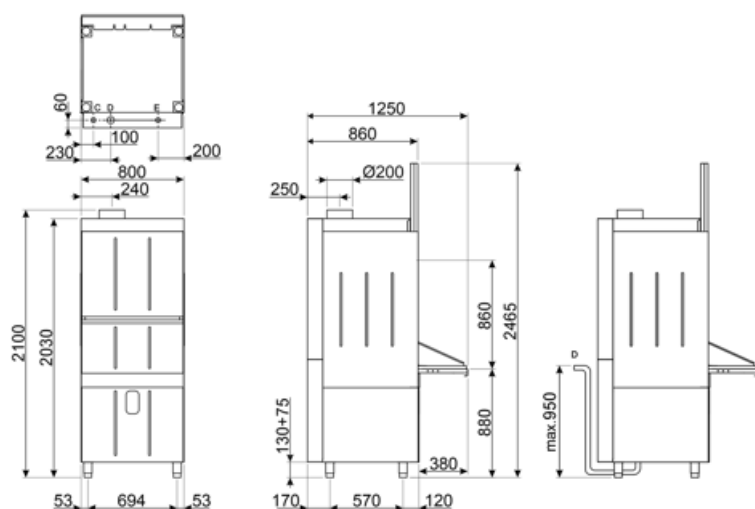


D = SCARICO 1/2", VIDEANGE 1/2", DRAIN 1/2", ABFLUSS 1/2", DESAGÜE 1/2", CIBB 1/2"
C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLUSS 1/2" GAS, CARGA AGUA 1/2" GAS, HANOP BOED 1/2" GAS
E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Accesorios Compatible



WB6070G01

Cesta universal con fondo plano,
700x600x305 mm



WH00S02

Basket for utensils, dim. (WxDxH)
150x150x250 mm



WH00B02

Agujero para bolsa de bolsillo

Symbols glossary



SUITABLE FOR EURONORM TRAY



SUITABLE FOR GASTRONORM
TRAY



MAX.USABLE HEIGHT 850mm

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

Sistema de 2 etapas

Sistema de filtrado en dos etapas para garantizar un rendimiento de lavado óptimo y la máxima pureza del agua.

El sistema de filtrado está completamente fabricado en acero inoxidable AISI 304, lo que garantiza una resistencia, durabilidad y protección contra la corrosión máximas. Consta de dos etapas de filtración: la primera incorpora una rejilla que evita que los residuos de suciedad entren en la cuba, evitando así que el agua se enturbie; la segunda protege las bombas de lavado al retener posibles restos que puedan introducirse accidentalmente en la cuba durante la limpieza del filtro.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Wash pumps

Double-pump washing system to effectively remove even the most stubborn dirt

The Smeg utensil washer is equipped with an innovative double-pump washing system, designed to provide high power and an even distribution of water flow. This advanced technology ensures thorough and effective cleaning, removing even the most stubborn dirt residues.

Side spray wash

Equipped with lateral washing arms to reach even the most difficult corners

The washing system is equipped with lateral washing arms designed to ensure complete coverage, reaching every corner and ensuring that no surface is left uncovered. Thanks to this advanced technology, even baskets and large items are treated with thorough and impeccable cleaning, removing all traces of dirt and ensuring excellent results at every stage of the washing process.