

VFU50SFR

Sink material	Stainless steel
Type	Monoblock bowl
No. of bowls	1
EAN code	8017709304669



Aesthetics



Aesthetic	Universale	Building in type	Flush fitted, Flat, Undermount
Colour	Stainless steel		
Finishing	Brushed	Logo	Embossed
Series	Mira	Tap hole / precut tap hole	No Taphole

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	500 x 400 x 200	200	15	Yes, flush fitted	Wall position	3.5"

Technical Features




Dimensions of the product (mm)	200x540x440 mm	Height from kitchen top	1 mm
Cutout dimension topmount (mm)	525*425 mm	Base unit size	60 cm
Cutout dimension undermount (mm)	504*404 mm	No. of clips	8
Undermount cutout radius	17 mm	Type of clips	Standard + undermount clip

Accessories Included

**Accessories for
installation**

Strainer, Savespace siphon
with dishwasher outlet
connection, Fixing clips,
Silicone

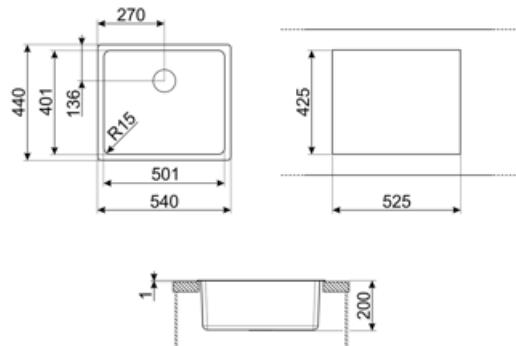

Compatible Accessories

3712

Siphon single bowl sinks (dishwasher connection included)

3713

Siphon double bowls sinks (dishwasher connection included)

CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe

**COL19H**

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm

**COL19**

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 12 mm

**COL36**

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm

**DB34**

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth

**KITDS**

Soap dispenser chrome finishing with round knob

**KITDSQ**

Soap dispenser chrome finishing with square knob 40x40 mm

**KITFD050**

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

**KITFD075**

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

**KITFD100**

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

RND1V

Rondò waste kit 1 bowl with standard overflow

Symbols glossary

 60	Cupboard width required for sink installation	 20cm	Sink depth - depending on the model, the depth can be from 13 to 24,5
 Flat:	Installation of product with flat edge.	 Flush	Flush-fitted installation: Models of sinks/hobs which are integrated flush with the tabletop of a kitchen unit.
 Under	table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.		



Benefit (TT)

One bowl

A single bowl for greater adaptability, capacity and space optimisation