

# VR12S34

Sink material	Stainless steel
Type	Welded bowl
No. of bowls	1
EAN code	8017709308094



## Aesthetics



Aesthetic	Universal	Logo	Embossed
Colour	Stainless steel	Alternative colours available	No
Acabamento	Escovado	Half bowl cup drainer	No
Serie	Mira	Tap hole / precut tap hole	No Taphole
Building in type	Flush fitted, Flat, Undermount		

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	340 x 400 x 200	200	12	Yes, flush fitted	Wall position	3.5"

## Technical Features




Dimensions of the product (mm)	201x380x440 mm	Tap hole	No
Cutout dimension topmount (mm)	370x430 mm	Popup command	No
Dimensão do recorte sob a montagem (mm)	340x400 mm	Pre-assembled gasket	No
Cutout radius	12 mm	No. of clips	8
Height from kitchen top	1 mm	Type of clips	Clip padrão + subtopo
Base unit size	45, 50 cm	Possibility to install waste disposal	No

Accessories Included



Accessories for installation	Strainer, Siphon with dishwasher outlet connection, Fixing clips, Silicone	Glass board	No
Colander	No	Basket	No
Rondò Cover waste kit	No	Wooden board	No
Kit integrado de residuos de descarga	Sim	White board	No

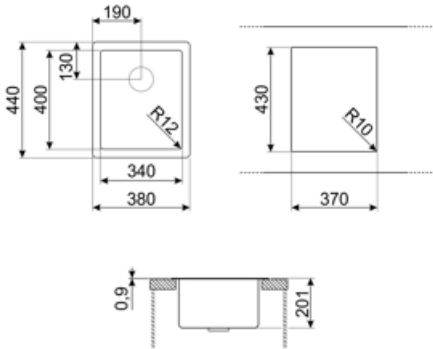

## Compatible Accessories



### CB25MN

Tábua única de corte HPE para caber em tigelas de raio mínimo, fosca preta, mede 250 x 410 H 12 mm, pode ir à máquina lava-louça



### COL19

Coador aço inox para encaixar na tigela de raio MÍNIMO mm, mede 200 x 410 x 26 mm



### COL36

Coador de aço para tigelas de raio mínimo, mede 370 x 410 x 30 mm



### CB28QU

Tábua única de corte HPL para raio mínimo, carvalho, mede 280 x 418 H 12 mm



### COL19H









Coador aço inox para encaixar na tigela de raio MÍNIMO mm, mede 200 x 410 x 100 mm



### KITPUSH

1 Pia pop-up automático em AISI304 com botão APENAS para pias com kit de resíduos integrados R12

## Symbols glossary

	Largura do armário necessária para a instalação da pia		Largura do armário necessária para a instalação da pia
	Profundidade da pia - dependendo do modelo, a profundidade pode ser de 13 a 24,5		Plana Instalação de produtos com aresta plana.
	Instalação embutida: Modelos de pias/fogões que são integrados nivelados com a mesa de uma unidade de cozinha.		Instalação sob o tampo da mesa: A pia é fixada sob o tampo da mesa, que estende a superfície de trabalho e a profundidade da pia.
	Um exclusivo kit de resíduos totalmente integrado à pia dá um efeito elegante e garante maior higiene com a superfície contínua permitindo combinar comodidade com total segurança durante a preparação dos alimentos. O novo design do plugue é ergonômico e é mais fácil de extrair.		On this sink it is not possible to install the waste disposal

---

## Benefit (TT)

---

### **One bowl**

A single bowl for greater adaptability, capacity and space optimisation

### **Integrated flush waste kit**

Integrated flush waste kit to maximise the efficiency of your kitchen

The fully integrated flush waste kit in stainless steel guarantees hygiene and safety during food preparation as well as giving the sink an elegant appearance.