

# VSGX860CT

Sink material	Composite
Type	Composite bowl
No. of bowls	1
EAN code	8017709282387



## Aesthetics



Aesthetic	Universale	Logo	Applied
Colour	Cement / Concrete	Alternative colours available	Black, White
Series	Quadra	Tap hole / precut tap hole	Prepared
Building in type	Standard		

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Minimum radius	796 x 386 x 215	215	6	Yes, flush fitted	Wall position	3.5"

## Technical Features




Characteristics composite material	Antibacterial, Easy to clean, Anti-scratch, Thermal shock resistant, High temperatures resistant, Impact resistant, UV Resistant	Base unit size	90 cm
		Tap hole	1
		Tap hole diameter	35 mm
		No. of clips	8
		Type of clips	Standard
Frame depth (mm)	5		
Dimensions of the product (mm)	215x860x510 mm		

**Cutout dimension topmount (mm)** 840 x 480 mm  
**Undermount cutout radius** 15 mm  
**Height from kitchen top** 10 mm

## Accessories included

<b>Accessories for installation</b>	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips	<b>Oak HPL chopping board</b>	Yes
-------------------------------------	--	-------------------------------	-----

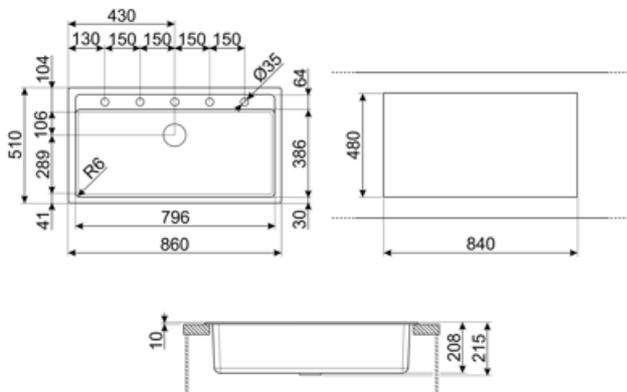

---

## Compatible Accessories

---



### CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe



### COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



### COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



### KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



### KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



### KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



### KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

---

## Alternative products

---

VSGX860MN

Colour: Black



---

## Symbols glossary

---

	Antibacterial		Antiscratch
	Cupboard width required for sink installation.		Sink depth - depending on the model, the depth can be from 13 to 24,5.
	Standard installation: Traditional installation in tabletop, suitable for any kitchen sets.		Easy to clean
	High temperatures resistant		Impact resistant
	Thermal shock resistant		UV protection, does not fade over time.