

VSGX860MN

Sink material Composite Composite bowl Type

No. of bowls

EAN code 8017709311735



Aesthetics



Aesthetic Universale Applied Logo

Series Quadra Alternative colours White, Cemento / Concrete available Colour Black

Tap hole / precut tap Building in type Standard

hole

Prepared

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Minimum radius	796 x 386 x 215	215	6	Yes, flush fitted	Wall position	3.5"

Technical Features















Characteristics composite material

Antibacterial, Anti-scratch, Termal schock resistant, High temperatures

resistant, Impact resistant, Easy to clean, UV Resistant

No. of clips

Tap hole

Base unit size

Tap hole diameter

90 cm 1 35 mm

Type of clips Standard

Frame depth (mm)

Dimensions of the product (mm)

topmount (mm)

215x860x510 mm

Cutout dimension 840 x 480 mm

SMEG SPA 29/3/2024



Height from kitchen top 10 mm

Accessories Included

Accessories for installation

Colander

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips


Yes

Black matt standard waste kit and rectangular overflow Black HPL chopping

board

Yes

Yes

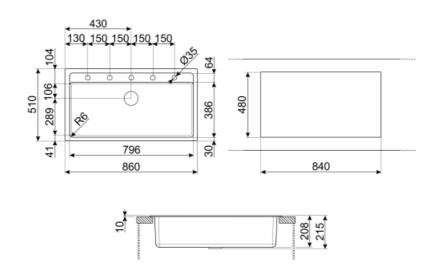

SMEG SPA 29/3/2024



Not included accessories



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

SMEG SPA 29/3/2024



Symbols glossary (TT)



Antibacterial



Cupboard width required for sink installation



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



High temperatures resistant



Easy to clean



Antiscratch



Sink depth - depending on the model, the depth can be from 13 to 24,5



Termal schock resistant



Impact resistant



UV protection, does not fade over time.

SMEG SPA 29/3/2024