

VSGX860N

Composite Sink material Composite bowl Type

No. of bowls

EAN code 8017709282394



Aesthetics



Aesthetic Universale Applied Logo

Series Quadra Alternative colours White, Cemento / Concrete available Colour Black

Tap hole / precut tap Prepared Building in type Standard

hole

Base unit size

Tap hole diameter

Tap hole

No. of clips

Type of clips

90 cm

35 mm

Standard

1

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Minimum radius	796 x 386 x 215	215	6	Yes, flush fitted	Wall position	3.5"

Technical Features













Characteristics composite material

Antibacterial, Anti-scratch, Termal schock resistant, High temperatures

resistant, Impact resistant, Easy to clean, UV Resistant

Frame depth (mm)

215x860x510 mm

product (mm) **Cutout dimension** topmount (mm)

Dimensions of the

840 x 480 mm

SMEG SPA 06/05/2024



Undermount cutout

15 mm

radius

Height from kitchen top

10 mm


Accessories Included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

Oak HPL chopping board

Yes

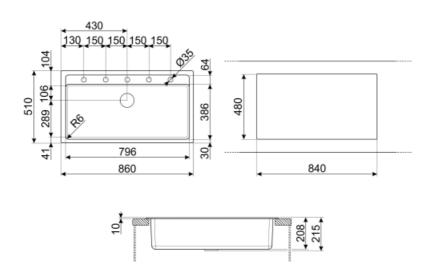

SMEG SPA 06/05/2024



Not included accessories



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

SMEG SPA 06/05/2024



Symbols glossary (TT)



Cupboard width required for sink installation



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Antiscratch



High temperatures resistant



Easy to clean



Sink depth - depending on the model, the depth can be from 13 to 24,5



Antibacterial



Termal schock resistant



Impact resistant



UV protection, does not fade over time.

SMEG SPA 06/05/2024