

VSGX860N

Sink material	Composite
Type	Composite bowl
No. of bowls	1
EAN code	8017709282394



Aesthetics



Aesthetic	Universale	Logo	Applied
Colour	Black	Alternative colours available	White, Cemento / Concrete
Series	Quadra		
Building in type	Standard	Tap hole / precut tap hole	Prepared

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Minimum radius	796 x 386 x 215	215	6	Yes, flush fitted	Wall position	3.5"

Technical Features



Characteristics composite material	Antibacterial, Easy to clean, Anti-scratch, Termal schock resistant, High temperatures resistant, Impact resistant, UV Resistant	Base unit size	90 cm
		Tap hole	1
		Tap hole diameter	35 mm
		No. of clips	8
		Type of clips	Standard

Frame depth (mm)

5

Dimensions of the product (mm)

215x860x510 mm

Cutout dimension 840 x 480 mm

topmount (mm)

Undermount cutout radius 15 mm

Height from kitchen top 10 mm


Accessories included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

Oak HPL chopping board

Yes

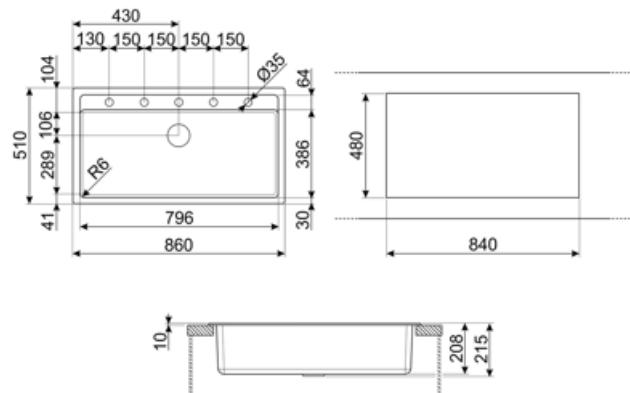

Compatible Accessories

**CB25MN**

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe

**COL19H**

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm

**KITDSQ**

Soap dispenser chrome finishing with square knob 40x40 mm

**KITFD075**

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

**COL19**

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm

**COL36**

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm

**KITFD050**

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

Symbols glossary

	Cupboard width required for sink installation.		Sink depth - depending on the model, the depth can be from 13 to 24,5.
	Standard installation: Traditional installation in tabletop, suitable for any kitchen sets.		Antibacterial
	Antiscratch		Termal schock resistant
	High temperatures resistant		Impact resistant
	Easy to clean		UV protection, does not fade over time.