

VSTR3434-2

Sink materialStainless steelSink typeSide by side bowlsNo. of bowls2

EAN code 8017709190576



Aesthetics

AestheticsUniversalBuilding in typeUndermountSeriesMiraLogoEmbossedColourStainless steelTap hole / precut tapNo Taphole

Finishing Brushed hole

	Bowl type	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Minimum radius	1	340 x 400 x 200	200	15	Yes, flush fitted	Wall position	3.5"
LH Bowl	Minimum radius	1	340 x 400 x 200	200	15	Yes, flush fitted	Wall position	3.5"

Technical Features



Frame thickness 1 mm

Dimensions of the product WxDxH (mm)

Cutout dimension 411*740 mm

200x802x472 mm

undermount (mm)

Base unit size 90 cm

Tap hole diameter 35 mm
Dividing wall width 48 mm
No. of clips 8


Type of clips Undermount clip

Accessories Included



Accessories for installation

Strainer, Siphon with dishwasher outlet connection, Fixing clips

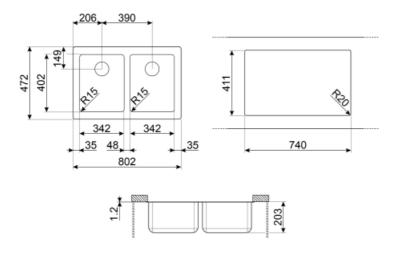



Not included accessories



RND1V

Rondò waste kit 1 bowl with standard overflow



KITFD050

Waste disposal 0,5 HP Motor: 1/2 horsepower Fits all sinks with 3 1/2" waste outlet



DB34

Cestello in filo inox per abbinamento alle vasche di dimensione 340*400 mm



KITFD100

Waste disposal 1 HP Motor: 1 horsepower Fits all sinks with 3 1/2" waste outlet



3713

Siphon double bowls sinks (dishwasher connection included)



KITFD075

Waste disposal 0,75 HP Motor: 3/4 horsepower Fits all sinks with 3 1/2" waste outlet



Symbols glossary



Cupboard width required for sink installation



Sink depth - depending on the model, the depth can be from 13 to 24,5



Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.