

VSTR34BRX

| | |
|----------------------|-----------------|
| Sink material | Stainless steel |
| Type | Monoblock bowl |
| No. of bowls | 1 |
| EAN code | 8017709303006 |



Aesthetics



| | | | |
|------------------|-------------|-----------------------------------|------------|
| Aesthetic | Universale | Building in type | Undermount |
| Colour | Brass | Logo | Embossed |
| Finishing | PVD Brushed | Tap hole / precut tap hole | No Taphole |
| Series | Mira | | |

| | Bowl type | Bowl dimensions, WxDxH (mm) | Bowl depth (mm) | Radius corner bowl | Overflow | Strainer position | Strainer dimension |
|------|------------------|------------------------------------|------------------------|---------------------------|-------------------|--------------------------|---------------------------|
| Bowl | Minimum radius | 340 x 400 x 200 | 200 | 15 | Yes, flush fitted | Wall position | 3.5" |

Technical Features




| | | | |
|---|---|--------------------------|-----------------|
| Characteristics PVD coating | Coating thickness , Eco-friendly, Easy to clean, Hypoallergenic | Tap hole diameter | 35 mm |
| No. of clips | 4 | Type of clips | Undermount clip |
| Dimensions of the product (mm) | 200x382x442 mm | | |
| Cutout dimension undermount (mm) | 344*404 mm | | |
| Base unit size | 45 cm | | |

Accessories included

Accessories for
installation

Strainer, Fixing clips

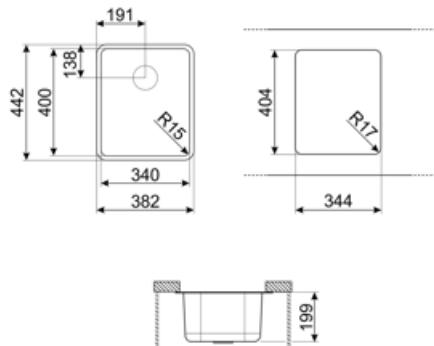

Compatible Accessories

3712



Siphon single bowl sinks (dishwasher connection included)

3713



Siphon double bowls sinks (dishwasher connection included)

DB34



St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth

KITFD050



Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

KITFD100



Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

Alternative products



VSTR34DKX

Colour: Dark Inox



VSTR34CUX

Colour: Copper

Symbols glossary

| | | | |
|--|---|---|---|
|  | Cupboard width required for sink installation. |  | Sink depth - depending on the model, the depth can be from 13 to 24,5. |
|  | Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink. |  | Coating thickness between 0.2mm and 2mm |
|  | Easy to clean |  | The manufacturing process of PVD treatment is 100% green and eco-friendly |
|  | PVD coatings are hypoallergenic and suitable for use in contact with food | | |



Benefit (TT)

One bowl

A single bowl for greater adaptability, capacity and space optimisation