# VSTR34DKX

| | |
|---|---|
| **Sink material** | Stainless steel |
| **Type** | Monoblock bowl |
| **No. of bowls** | 1 |
| **EAN code** | 8017709276799 |



## Aesthetics

| | | | |
|---|---|---|---|
| **Aesthetic** | Universale | **Building in type** | Undermount |
| **Colour** | Dark Inox | **Logo** | Embossed |
| **Finishing** | PVD Brushed | **Tap hole / precut tap hole** | No Taphole |
| **Series** | Mira | | |


| | Bowl type | Bowl dimensions, WxDxH (mm) | Bowl depth (mm) | Radius corner bowl | Overflow | Strainer position | Strainer dimension |
|---|---|---|---|---|---|---|---|
| Bowl | Minimum radius | 340 x 400 x 200 | 200 | 15 | Yes, flush fitted | Wall position | 3.5" |

## Technical Features

| | | | |
|---|---|---|---|
| **Characteristics PVD coating** | Coating thickness , Eco-friendly, Easy to clean, Hypoallergenic | **Tap hole diameter** | 35 mm |
| **Dimensions of the product (mm)** | 200x382x442 mm | **No. of clips** | 4 |
| **Cutout dimension undermount (mm)** | 344x404 mm | **Type of clips** | Undermount clip |
| **Base unit size** | 45 cm | | |

## Accessories included

| | |
|---|---|
| **Accessories for installation** | Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips |

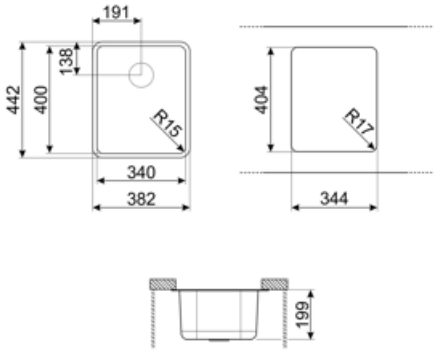

## Compatible Accessories



**3712**

Siphon single bowl sinks (dishwasher connection included)



**3713**

Siphon double bowls sinks (dishwasher connection included)



**DB34**

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



**KITFD050**

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



**KITFD075**

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



**KITFD100**

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

## Alternative products



**VSTR34BRX**

**Colour:** Brass



**VSTR34CUX**

**Colour:** Copper

## Symbols glossary




Cupboard width required for sink installation.




Sink depth - depending on the model, the depth can be from13 to 24,5.



Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.



Coating thickness between 0.2mm and 2mm



Easy to clean



PVD coatings are hypoallergenic and suitable for use in contact with food



The manufacturing process of PVD treatment is 100% green and eco-friendly

# Benefit (TT)

**One bowl**

A single bowl for greater adaptability, capacity and space optimisation