

# VSTR4018-2

**Sink material** Stainless steel  
**Type** Side by side undermount bowls  
**No. of bowls** 1 + 3/4  
**EAN code** 8017709262129



## Aesthetics



<b>Aesthetic</b>	Universale	<b>Building in type</b>	Undermount
<b>Colour</b>	Stainless steel	<b>Logo</b>	Embossed
<b>Finishing</b>	Brushed	<b>Tap hole / precut tap hole</b>	No Taphole
<b>Series</b>	Mira		

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow LH bowl	Strainer position	Strainer dimension
RH Bowl	Minimum radius	1	180 x 340 x 162	162	15		Centre of bowl	3.5"
LH Bowl	Minimum radius	1	400 x 340 x 200	200	15	Yes, flush fitted	Centre of bowl	3.5"

## Technical Features

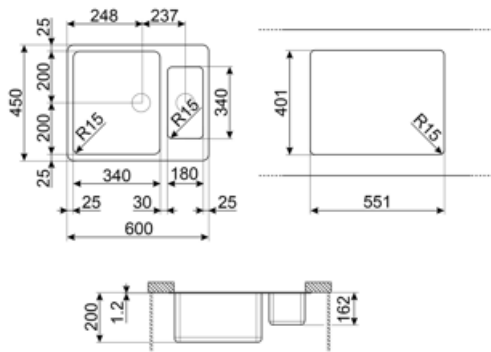


<b>Frame thickness</b>	1 mm	<b>Tap hole diameter</b>	35 mm
<b>Dimensions of the product (mm)</b>	200x608x472 mm	<b>Dividing wall width</b>	30 mm
<b>Cutout dimension undermount (mm)</b>	401*551 mm	<b>No. of clips</b>	8
<b>Base unit size</b>	80 cm	<b>Type of clips</b>	Undermount clip

## Accessories included

Accessories for  
installation

Strainer, Savespace siphon  
with dishwasher outlet  
connection, Fixing clips



---

## Compatible Accessories

---



**3713**

Siphon double bowls sinks (dishwasher connection included)



**DB34**

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



**KITFD050**

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



**KITFD075**

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



**KITFD100**

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet







**RND2V**

2 Bowls standard Rondò waste kit with rectangular overflow

---

## Symbols glossary

---

- |  |  |   |   |
|--|--|---|---|
|  | Cupboard width required for sink installation.                         |  | Sink depth - depending on the model, the depth can be from 13 to 24,5   |
|  | Sink depth - depending on the model, the depth can be from 13 to 24,5. |  | Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink. |