

VSTR50BRX

| | |
|---------------|---------------------|
| Sink material | Stainless steel |
| Sink type | Single-pressed bowl |
| No. of bowls | 1 |
| EAN code | 8017709303020 |



Aesthetics



| | | | |
|-------------------|-------------|-----------------------------------|------------|
| Aesthetics | Universal | Building in type | Undermount |
| Series | Mira | Logo | Embossed |
| Colour | Brass | Tap hole / precut tap hole | No Taphole |
| Finishing | PVD Brushed | | |

| | Bowl type | Bowl dimensions, WxDxH (mm) | Bowl depth (mm) | Radius corner bowl | Overflow | Strainer position | Strainer dimension |
|------|----------------|-----------------------------|-----------------|--------------------|-------------------|-------------------|--------------------|
| Bowl | Minimum radius | 500 x 400 x 200 | 200 | 15 | Yes, flush fitted | Wall position | 3.5" |

Technical Features




| | | | |
|---|--|--------------------------|-----------------|
| Characteristics composite material | Coating thickness , Eco-friendly, Pre-assembled gasket, Hypoallergenic | Tap hole diameter | 35 mm |
| Dimensions of the product WxDxH (mm) | 200x542x442 mm | No. of clips | 8 |
| Cutout dimension undermount (mm) | 404*504 mm | Type of clips | Undermount clip |
| Base unit size | 60 cm | | |

Accessories Included

Accessories for
installation

Strainer, Siphon with
dishwasher outlet
connection, Fixing clips

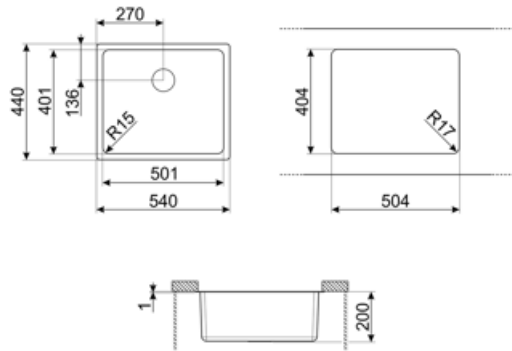

Compatible Accessories



3712

Siphon single bowl sinks (dishwasher connection included)



3713

Siphon double bowls sinks (dishwasher connection included)



DB34

Cestello in filo inox per abbinamento alle vasche di dimensione 340*400 mm



KITFD050

Waste disposal 0,5 HP Motor: 1/2 horsepower Fits all sinks with 3 1/2" waste outlet



KITFD075








Waste disposal 0,75 HP Motor: 3/4 horsepower Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP Motor: 1 horsepower Fits all sinks with 3 1/2" waste outlet

Symbols glossary

- | | | | |
|--|---|---|---|
|  | Cupboard width required for sink installation |  | Sink depth - depending on the model, the depth can be from 13 to 24,5 |
|  | Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink. |  | Easy to clean |
|  | Coating thickness between 0.2mm and 2mm |  | PVD coatings are hypoallergenic and suitable for use in contact with food |
|  | The manufacturing process of PVD treatment is 100% green and eco-friendly | | |

Benefit

One bowl

A single bowl for greater adaptability, capacity and space optimisation