

VSTR50CUX

Sink material	Stainless steel
Sink type	Single-pressed bowl
No. of bowls	1
EAN code	8017709276850



Aesthetics



Aesthetics	Universal	Building in type	Undermount
Series	Mira	Logo	Embossed
Colour	Copper	Tap hole / precut tap hole	No Taphole
Finishing	PVD Brushed		

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	500 x 400 x 200	200	15	Yes, flush fitted	Wall position	3.5"

Technical Features




Characteristics composite material	Coating thickness , Eco-friendly, Pre-assembled gasket, Hypoallergenic	Tap hole diameter	35 mm
Dimensions of the product WxDxH (mm)	200x542x442 mm	No. of clips	8
Cutout dimension undermount (mm)	404*504 mm	Type of clips	Undermount clip
Base unit size	60 cm		

Accessories Included

## Accessories for installation

Strainer, Siphon with  
dishwasher outlet  
connection, Fixing clips

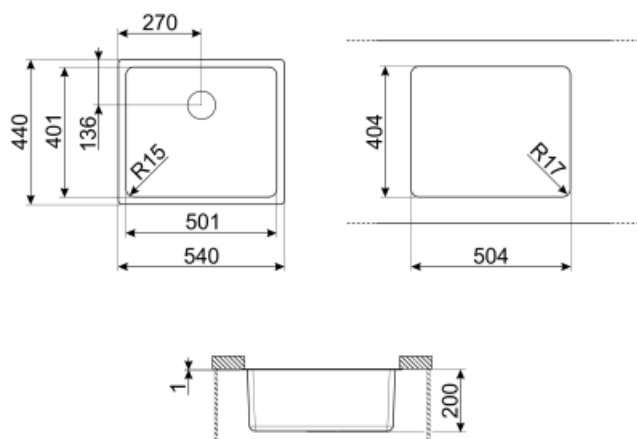

---

## Not included accessories

---



### **KITFD050**

Waste disposal 0,5 HP Motor: 1/2 horsepower Fits all sinks with 3 1/2" waste outlet



### **KITFD100**

Waste disposal 1 HP Motor: 1 horsepower Fits all sinks with 3 1/2" waste outlet



### **DB34**

Cestello in filo inox per abbinamento alle vasche di dimensione 340\*400 mm



### **3712**

Siphon single bowl sinks (dishwasher connection included)



### **3713**

Siphon double bowls sinks (dishwasher connection included)










### **KITFD075**

Waste disposal 0,75 HP Motor: 3/4 horsepower Fits all sinks with 3 1/2" waste outlet

---

## Symbols glossary

---

	Cupboard width required for sink installation		Sink depth - depending on the model, the depth can be from 13 to 24,5
	Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.		Coating thickness between 0.2mm and 2mm
	Easy to clean		The manufacturing process of PVD treatment is 100% green and eco-friendly
	PVD coatings are hypoallergenic and suitable for use in contact with food		