

VSTR50CUX

Sink material	Stainless steel
Type	Monoblock bowl
No. of bowls	1
EAN code	8017709276850



Aesthetics



Aesthetic	Universale	Building in type	Undermount
Colour	Copper	Logo	Embossed
Finishing	PVD Brushed	Tap hole / precut tap hole	No Taphole
Series	Mira		

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	500 x 400 x 200	200	15	Yes, flush fitted	Wall position	3.5"

Technical Features




Characteristics PVD coating	Coating thickness , Eco-friendly, Easy to clean, Hypoallergenic	Tap hole diameter	35 mm
Dimensions of the product (mm)	200x542x442 mm	No. of clips	8
Cutout dimension undermount (mm)	404*504 mm	Type of clips	Undermount clip
Base unit size	60 cm		

Accessories included

Accessories for installation

Strainer, Savespace siphon
with dishwasher outlet
connection, Fixing clips

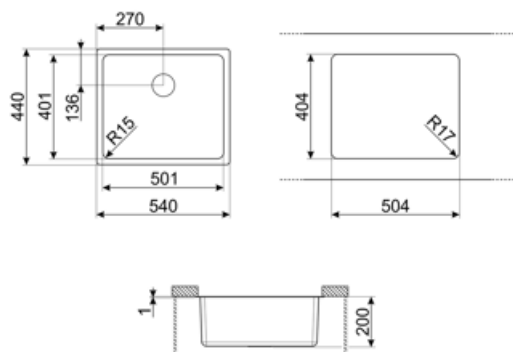

Compatible Accessories



3712

Siphon single bowl sinks (dishwasher connection included)



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



3713

Siphon double bowls sinks (dishwasher connection included)



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

Alternative products



VSTR50BRX
Colour: Brass



VSTR50DKX
Colour: Dark Inox

Symbols glossary



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.



Easy to clean



Coating thickness between 0.2mm and 2mm



PVD coatings are hypoallergenic and suitable for use in contact with food



The manufacturing process of PVD treatment is 100% green and eco-friendly

Benefit (TT)

One bowl

A single bowl for greater adaptability, capacity and space optimisation