

# VSTR50DKX

Materiaal	Inox
Type spoelbak	Enkel geperste spoelbak
Aantal spoelbakken	1
EAN-code	8017709276812



## Design



Design	Universeel	Type inbouw	Onderbouw
Kleur	Dark Inox	Logo	In reliëf
Afwerking	PVD Brushed	Geperforeerde opening voor kraan	Geen geperforeerde opening voor kraan
Series	Mira		

	Type spoelbak	Afmetingen spoelbak, BxHxD (mm)	Diepte spoelbak (mm)	Hoekradius spoelbak	Overloop spoelbak	Positie crepine spoelbak	Afmeting crepine
Spoelbak	Minimum radius	500 x 400 x 200	200	15	Ja, verzonken	Wandkap	8,89 cm

## Technische specificaties




Characteristics PVD coating	Coating thickness , Eco-friendly, Easy to clean, Hypoallergenic	Diameter kraangat	35 mm
Afmetingen product (mm)	200x542x442 mm	Aantal haken	8
Cutout dimension undermount (mm)	404*504 mm	Type haken	Onderbouw haken
Afmeting inbouwmeubel	60 cm		

## Meegeleverde accessoires

Accessoires voor  
installatie inbegrepen

Crepine, Sifon met  
vatwasseraansluiting,  
Montagehaken

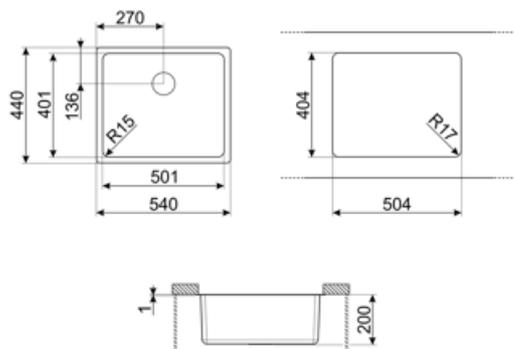

---

## Compatible Accessories

---



**3712**

Siphon single bowl sinks (dishwasher connection included)



**DB34**

St/steel drain basket to fit STD radius  
340 x 400 bowl, 180 mm depth



**KITFD075**

Waste disposal 0,75 HP, Motor: 1/2  
horsepower, Fits all sinks with 3 1/2"  
waste outlet



**3713**

Siphon double bowls sinks  
(dishwasher connection included)



**KITFD050**

Waste disposal 0,5 HP, Motor: 1/2  
horsepower, Fits all sinks with 3 1/2"  
waste outlet



**KITFD100**

Waste disposal 1 HP, Motor: 1/2  
horsepower, Fits all sinks with 3 1/2"  
waste outlet

---

## Alternative products

---



**VSTR50CUX**  
Kleur: Koper



**VSTR50BRX**  
Kleur: Messing

---

## Symbols glossary

---

- |  |   |   |   |
|--|---|---|---|
|  | Breedte van het inbouwmeubel voor installatie spoelbak  |  | Sink depth - depending on the model, the depth can be from 13 to 24,5.    |
|  | Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink. |  | Easy to clean   |
|  | Coating thickness between 0.2mm and 2mm   |  | PVD coatings are hypoallergenic and suitable for use in contact with food |
|  | The manufacturing process of PVD treatment is 100% green and eco-friendly   |   |   |

---

## Benefit (TT)

---

### **One bowl**

A single bowl for greater adaptability, capacity and space optimisation