

VZ3434N

Sink materialComposite

TypeComposite sink

No. of bowls2

EAN code8017709213565



Aesthetics



AestheticSeriesColourBuilding in type

UniversaleQuadraBlackStandard

LogoAlternative colours availableTap hole / precut tap hole

Applied/on overflowWhite, Cream, Beige, Cemento / Concrete, EXTRA White, EXTRA BlackPrepared

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow LH bowl	Strainer position	Strainer dimension
RH Bowl	Minimum radius	343 x 395 x 220	220	5		Wall position	3.5"
LH Bowl	Minimum radius	343 x 395 x 220	220	5	Yes, traditional	Side bowl	3.5"

Technical Features



Characteristics composite material

Antibacterial, Easy to clean, Anti-scratch , Termal schock resistant, High temperatures resistant, Impact resistant, UV Resistant

Base unit sizeTap holeTap hole diameterDividing wall widthNo. of clipsType of clips

80 cm135 mm34 mm4Standard


Frame depth (mm)

10

Dimensions of the product (mm)	235x790x500 mm
Cutout dimension topmount (mm)	770 X 480 mm
Undermount cutout radius	10 mm
Height from kitchen top	10 mm

Accessories included

Accessories for installation	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips
------------------------------	--

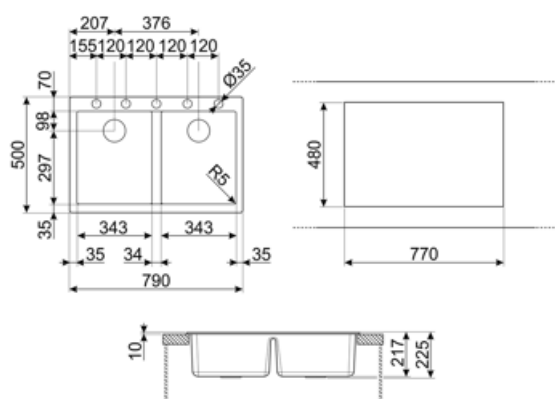

Compatible Accessories



CB28QU

Single HPL chopping board for minimum radius, oak, measures 280 x 418 H 12 mm



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD050











Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

Symbols glossary

	Antibacterial		Antiscratch
	Cupboard width required for sink installation		Sink depth - depending on the model, the depth can be from 13 to 24,5
	Standard installation: Traditional installation in tabletop, suitable for any kitchen sets		Thermal shock resistant
	High temperatures resistant		Impact resistant
	Easy to clean		UV protection, does not fade over time.

Benefit (TT)

Two bowls

Two bowls for greater versatility and dual functionality

Tap hole possibility

Possibility of having the tap hole for direct installation of the tap on the sink, for a larger and neater surface area