# VZP56B

| | |
|---|---|
| **Sink material** | Composite |
| **Type** | Composite bowl |
| **No. of bowls** | 1 |
| **EAN code** | 8017709294052 |



## Aesthetics

| | | | |
|---|---|---|---|
| **Aesthetic** | Universale | **Logo** | On overflow |
| **Colour** | White | **Alternative colours available** | Dove Gray, Black, Cemento / Concrete |
| **Series** | Quadra | **Tap hole / precut tap hole** | No Taphole |
| **Building in type** | Standard, Undermount | | |

| | Bowl type | Bowl dimensions, WxDxH (mm) | Bowl depth (mm) | Radius corner bowl | Overflow | Strainer position | Strainer dimension |
|---|---|---|---|---|---|---|---|
| Bowl | Minimum radius | 500 x 400 x 200 | 200 | 10 | Yes, flush fitted | Wall position | 3.5" |


## Technical Features

| | | | |
|---|---|---|---|
| **Characteristics composite material** | Antibacterial, Easy to clean, Anti-scratch , Termal schock resistant, High temperatures resistant, Impact resistant, UV Resistant | **Height from kitchen top** | 6 mm |
| | | **Base unit size** | 60 cm |
| | | **No. of clips** | 4 |
| | | **Type of clips** | Standard + undermount clip |
| **Dimensions of the product (mm)** | 200x556x456 mm | | |
| **Cutout dimension topmount (mm)** | 546x446 mm | | |

| | |
|---|---|
| **Cutout dimension undermount (mm)** | 500x400 mm |
| **Undermount cutout radius** | 10 mm |

## Accessories included

| | |
|---|---|
| **Accessories for installation** | Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips |

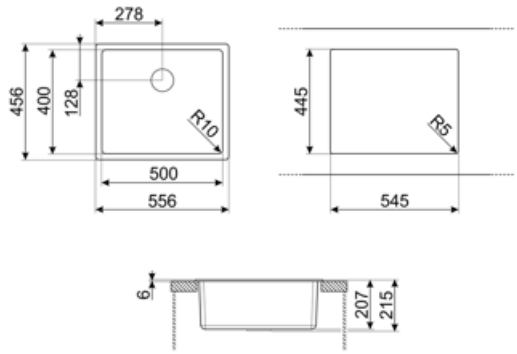

## Compatible Accessories



**KITDSQ**

Soap dispenser chrome finishing with square knob 40x40 mm



**KITFD050**

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



**KITFD075**

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



**KITFD100**

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

## Alternative products



**VZP56N**

**Colour:** Black



**VZP56CT**

**Colour:** Cement / Concrete

## Symbols glossary


Antibacterial


Antiscratch



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from13 to 24,5.


Standard installation: Traditional installation in tabletop, suitable for any kitchen sets.


Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.


Easy to clean


High temperatures resistant


Impact resistant


Termal schock resistant



UV protection, does not fade over time.

## Benefit (TT)

**One bowl**

A single bowl for greater adaptability, capacity and space optimisation