

VZP56B

Sink material Composite Composite bowl Type

No. of bowls

EAN code 8017709294052



Aesthetics





Aesthetic Universale On overflow Logo

Series Quadra Alternative colours Dove Gray, Black, Cemento available / Concrete

Colour White No Taphole

Building in type Standard, Undermount hole

Tap hole / precut tap

Bowl dimensions, Bowl depth Radius Strainer Strainer Bowl Overflow WxDxH (mm) corner bowl position dimension type (mm) Minimum Yes, flush Wall 500 x 400 x 215 3.5" Bowl 215 10 radius fitted position

Technical Features

















Characteristics composite material

Antibacterial, Anti-scratch, Termal schock resistant, High temperatures

resistant, Impact resistant, Easy to clean, UV Resistant Height from kitchen top 6 mm Base unit size 60 cm No. of clips

Type of clips Standard + undermount clip

Dimensions of the product (mm)

215x556x456 mm

Cutout dimension topmount (mm)

546x446 mm

Cutout dimension undermount (mm) 500x400 mm

SMEG SPA 19/4/2024




Undermount cutout radius

10 mm

Accessories Included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

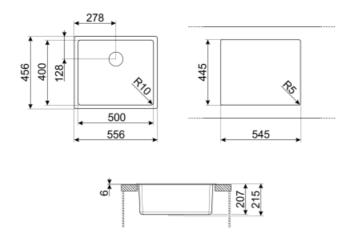

SMEG SPA 19/4/2024



Not included accessories



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



CB28QU

Single HPL chopping board for miminum radius, oak, measures 280 x 418 H 12 mm

SMEG SPA 19/4/2024



Symbols glossary (TT)



Antibacterial



Cupboard width required for sink installation



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Termal schock resistant



Impact resistant



UV protection, does not fade over time.



Antiscratch



Sink depth - depending on the model, the depth can be from 13 to 24,5



Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.



High temperatures resistant



Easy to clean

SMEG SPA 19/4/2024