

VZP56N

Sink material	Composite
Sink type	Composite bowl
No. of bowls	1
EAN code	8017709294076



Aesthetics



Aesthetics	Universal	Logo	On overflow
Colour	Black	Alternative colours available	Dove Grey, White, Cemento / Concrete
Series	Qudra	Tap hole / precut tap hole	No Taphole
Building in type	Standard, Undermount		

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	500 x 400 x 215	215	10	Yes, flush fitted	Wall position	3.5"

Technical Features




Characteristics composite material	Strainer, Pre-assembled gasket, Siphon with dishwasher outlet connection, Siphon save space with dishwasher outlet connection, Fixing clips, Gasket, UV Resistant	Height from kitchen top	6 mm
		Base unit size	60 cm
		No. of clips	4
		Type of clips	Standard + undermount clip
Dimensions of the product WxDxH (mm)	215x556x456 mm		
Cutout dimension (mm)	546x446 mm		
Cutout dimension undermount (mm)	500x400 mm		

Cutout radius 10 mm

Accessories Included

Accessories for installation

Strainer, Siphon with dishwasher outlet connection, Fixing clips

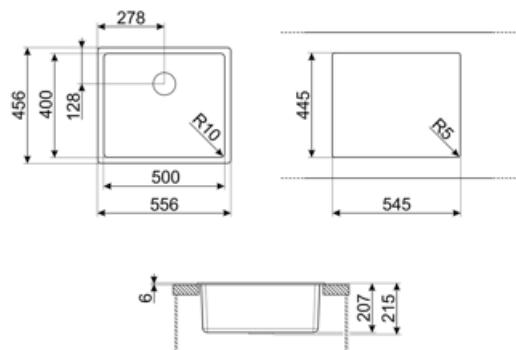

Compatible Accessories

CB25MN



Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe

COL19



St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm

COL36



St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm

KITFD050



Waste disposal 0,5 HP Motor: 1/2 horsepower Fits all sinks with 3 1/2" waste outlet

KITFD100



Waste disposal 1 HP Motor: 1 horsepower Fits all sinks with 3 1/2" waste outlet

CB28QU



Single HPL chopping board for minimum radius, oak, measures 280 x 418 H 12 mm

COL19H



St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



KITDSQ

Soap dispenser Square knob



KITFD075

Waste disposal 0,75 HP Motor: 3/4 horsepower Fits all sinks with 3 1/2" waste outlet

Alternative products



VZP56B

Colour: White



VZP56CT

Colour: Grey

Symbols glossary

 Antibacterial	 Antiscratch
 Cupboard width required for sink installation	 Sink depth - depending on the model, the depth can be from 13 to 24,5
 Standard installation: Traditional installation in tabletop, suitable for any kitchen sets	 Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.
 Easy to clean	 High temperatures resistant
 Impact resistant	 Termal schock resistant
 UV protection, does not fade over time.	



Benefit

One bowl

A single bowl for greater adaptability, capacity and space optimisation