

VZP56N

Composite Sink material Composite bowl Type

No. of bowls

EAN code 8017709294076



Aesthetics





Aesthetic Universale On overflow Logo

Alternative colours Series Quadra Dove Gray, White, Cemento available

/ Concrete Colour Black No Taphole

Tap hole / precut tap Building in type Standard, Undermount hole

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	500 x 400 x 215	215	10	Yes, flush fitted	Wall position	3.5"

Technical Features

















Characteristics composite material

Antibacterial, Anti-scratch, Termal schock resistant, High temperatures resistant, Impact resistant,

Easy to clean, UV Resistant

215x556x456 mm

No. of clips Type of clips

Base unit size

Height from kitchen top 6 mm 60 cm

Standard + undermount clip

Dimensions of the product (mm)

Cutout dimension

546x446 mm

topmount (mm) **Cutout dimension** undermount (mm)

500x400 mm

SMEG SPA 24/4/2024




Undermount cutout radius

10 mm

Accessories Included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

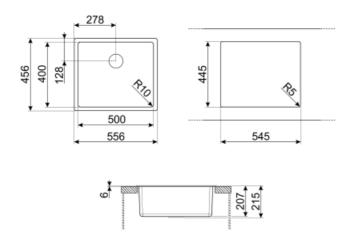

SMEG SPA 24/4/2024



Not included accessories



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



CB28QU

Single HPL chopping board for miminum radius, oak, measures 280 x 418 H 12 mm

SMEG SPA 24/4/2024



Symbols glossary (TT)

3

Antibacterial



Cupboard width required for sink installation



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Easy to clean



Impact resistant



UV protection, does not fade over time.



Antiscratch



Sink depth - depending on the model, the depth can be from 13 to 24,5



Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.



High temperatures resistant



Termal schock resistant

SMEG SPA 24/4/2024