

VZP76B

Sink material Composite
Type Composite bowl

No. of bowls

EAN code 8017709294014



Aesthetics





Aesthetic Universale Logo On overflow

Series Quadra Alternative colours Dove Gray, Black, Cemento

Colour White available / Concrete

Colour White available / Concrete

Building in type Standard, Undermount Tap hole / precut tap No Taphole hole

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	700 x 400 x 215	215	10	Yes, flush fitted	Wall position	3.5"

Technical Features















Characteristics composite material

Antibacterial, Anti-scratch, Termal schock resistant, High temperatures

resistant, Impact resistant, Easy to clean, UV Resistant

215x756x456 mm

Height from kitchen top 6 mm
Base unit size 80 cm
No. of clips 4

Type of clips Standard + undermount clip

Dimensions of the product (mm)

746x446 mm

Cutout dimension topmount (mm) Cutout dimension

undermount (mm)

700x400 mm




Undermount cutout radius

10 mm

Accessories Included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

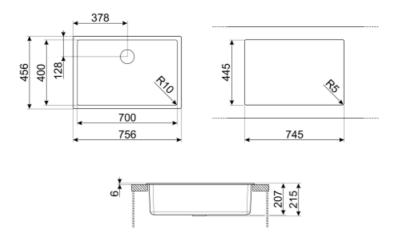



Not included accessories



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



CB28QU

Single HPL chopping board for miminum radius, oak, measures 280 x 418 H 12 mm



Symbols glossary (TT)



Antibacterial



Cupboard width required for sink installation



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Termal schock resistant



Impact resistant



UV protection, does not fade over time.



Antiscratch



Sink depth - depending on the model, the depth can be from 13 to 24,5



Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.



High temperatures resistant



Easy to clean