VZUM3434N

Sink material	Composite
Type	Composite sink
No. of bowls	2
EAN code	8017709213640



Aesthetics

Aesthetic	Universale	**Logo**	On overflow
Colour	Black	**Alternative colours available**	White, Cream, Beige, Cemento / Concrete, EXTRA White, EXTRA Black
Series	Quadra		
Building in type	Undermount	**Tap hole / precut tap hole**	No Taphole

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow LH bowl	Strainer position	Strainer dimension
RH Bowl	Minimum radius	343 x 395 x 220	220	5		Wall position	3.5"
LH Bowl	Minimum radius	343 x 395 x 220	220	5	Yes, traditional	Side bowl	3.5"


Technical Features

Characteristics composite material	Antibacterial, Easy to clean, Anti-scratch , Termal schock resistant, High temperatures resistant, Impact resistant, UV Resistant	**Base unit size**	80 cm
		Tap hole diameter	35 mm
		Dividing wall width	34 mm
		No. of clips	6
Frame depth (mm)	14	**Type of clips**	Undermount clip

Dimensions of the product (mm)	220x760x435 mm
Cutout dimension undermount (mm)	720 x 395 mm
Undermount cutout radius	5 mm

Accessories included

Accessories for installation	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

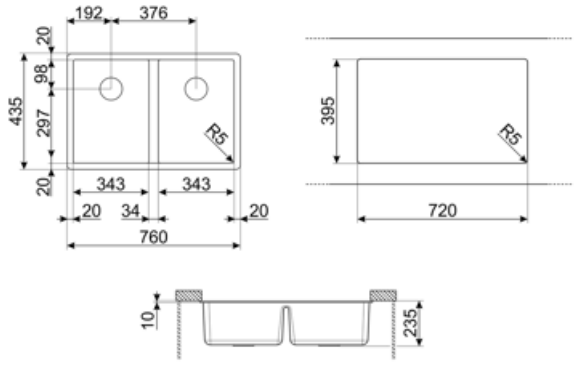

Compatible Accessories



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

Symbols glossary



Antibacterial



Antiscratch



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from13 to 24,5.



Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.



Termal schock resistant



High temperatures resistant



Impact resistant



Easy to clean



UV protection, does not fade over time.