


VZUM3434N

Sink material	Composite
Type	Composite sink
No. of bowls	2
EAN code	8017709213640



Aesthetics

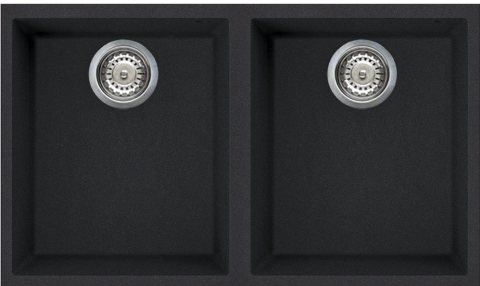

Aesthetic	Universale	Logo	On overflow
Series	Quadra	Alternative colours available	White, Cream, Beige, Cemento / Concrete, EXTRA White, EXTRA Black
Colour	Black	Tap hole / precut tap hole	No Taphole
Building in type	Undermount		

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow LH bowl	Strainer position	Strainer dimension
RH Bowl	Minimum radius	343 x 395 x 220	220	5		Wall position	3.5"
LH Bowl	Minimum radius	343 x 395 x 220	220	5	Yes, traditional	Side bowl	3.5"

Technical Features




Characteristics composite material	Antibacterial, Anti-scratch , Thermal shock resistant, High temperatures resistant, Impact resistant, Easy to clean, UV Resistant	Base unit size	80 cm
		Tap hole diameter	35 mm
		Dividing wall width	34 mm
		No. of clips	6
Frame depth (mm)	14	Type of clips	Undermount clip

Dimensions of the product (mm)	235x760x435 mm
Cutout dimension undermount (mm)	720 x 395 mm
Undermount cutout radius	5 mm

Accessories Included

Accessories for installation	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips
------------------------------	--

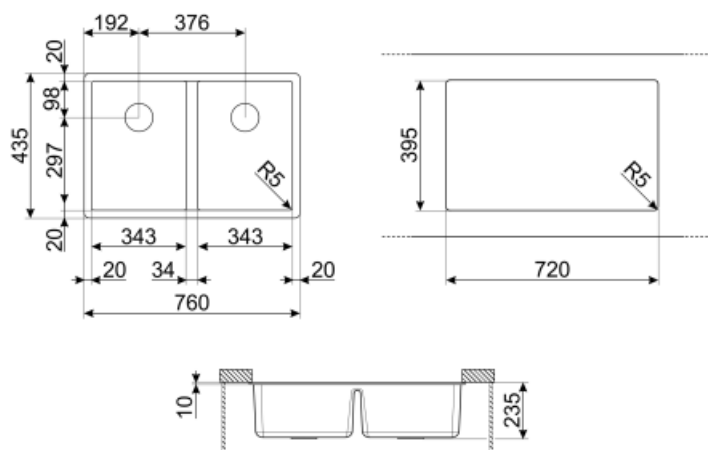

Not included accessories



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075











Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



CB28QU

Single HPL chopping board for minimum radius, oak, measures 280 x 418 H 12 mm

Symbols glossary (TT)

	Cupboard width required for sink installation		Sink depth - depending on the model, the depth can be from 13 to 24,5
	Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.		Antibacterial
	Antiscratch		Thermal shock resistant
	High temperatures resistant		Impact resistant
	Easy to clean		UV protection, does not fade over time.