

## WO-20-01

Family Water treatment

Subfamily Osmosis
Width 150 mm
Depth 550 mm
Height 490 mm



## **Equipments**

Filters burnout alert Yes

Overflow alert Yes

Automatic temporized membrane flow during extended inactivity

Permeate salinity regulator and viewer Yes

Pump drayness protection Yes

## Construction

Storage tank volume 2 l Max-min. incoming 1,5-6

Production per hour 120 l/h water pressure (bar)

Recovery rate (%) 35 (=25°F) Incoming water 35

maximum hardness (°F)

Incoming water 35 maximum naraness (\*r)
maximum temperature Incoming water max. 1200 µS/cm

maximum temperature Incoming water max. 1200 µS/cm conductivity

Yes

Incoming water 0,2

chlorine/ferric quantity (mg/l)


Consumption and connections

Electric connection 220-240 V / 3 A / 50-60 Hz Electric connection/total 690 W

electric connection 220-240 V / 3 A / 50-60 Hz Electric connection/total 690 W power

SMEG SPA 4/5/2024



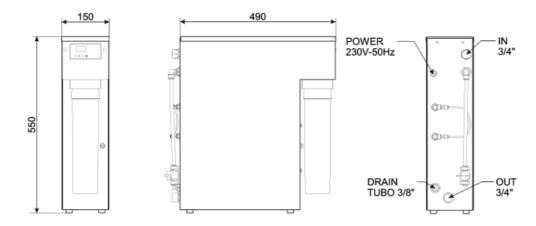

SMEG SPA 4/5/2024