

# KV194B3



|                      |                      |
|----------------------|----------------------|
| Product family       | Hood                 |
| Hood Type            | Decorative wall hood |
| Design               | Angled               |
| Extraction           | Extraction           |
| Electronic control   | Yes                  |
| Perimeter extraction | Yes                  |
| Material             | Glass                |
| EAN code             | 8017709327903        |
| Hood width           | 90 cm                |







## Aesthetics

|           |       |                   |             |
|-----------|-------|-------------------|-------------|
| Aesthetic | Linea | Glass Type        | Black       |
| Colour    | Black | Serigraphy colour | Grey        |
| Finishing | Glass | Logo              | Silk screen |

## Controls

|                 |                                     |           |       |
|-----------------|-------------------------------------|-----------|-------|
| Control setting | Touch control back-lighted<br>White | Led color | White |
|-----------------|-------------------------------------|-----------|-------|

## Programs / Functions

|                         |   |
|-------------------------|---|
| No. of speeds           | 3   |
| Intensive speed         |  |
| 24h air filter function |  |
| Time-setting options    |  |
| Auto-vent 2.0           |  |

## Technical Features

|  |               |       |                           |                 |
|--|---------------|-------|---------------------------|-----------------|
|       | No. of lights | 2     | Anti-grease filters       | Stainless steel |
|  | Light type    | LED   | Charcoal filters included | Yes             |
|  | Light Power   | 2.1 W |                           |                 |

|                                      |                  |   |        |
|--------------------------------------|------------------|---|--------|
| <b>Dimmer mode</b>                   | Yes              | <b>Filter replacement indicator</b>       | Yes    |
| <b>Light color temperature range</b> | 2700° - 4000° °K | <b>Vent outlet</b>                        | 150 mm |
| <b>Free outlet maximum capacity</b>  | 820 m³/h         | <b>Minimum distance from GAS hob</b>      | 650 mm |
| <b>Motor power</b>                   | 275 W            | <b>Minimum distance from ELECTRIC hob</b> | 450 mm |
| <b>No. of filters</b>                | 2                | <b>Non return valve</b>                   | Yes    |

|                 | <b>Extraction rate IEC 61591 [m³/h]</b> | <b>Noise level IEC 60704-2-13 [dBA]</b> |
|-----------------|---|---|
| Speed 1         | 277                                     | 50                                      |
| Speed 2         | 406                                     | 63                                      |
| Speed 3         | 636                                     | 70                                      |
| Intensive speed | 782                                     | 72                                      |

## Performance / Energy Label



|  |            |   |          |
|--|------------|---|----------|
| <b>Annual Efficiency Consumption (AEChood)</b>   | 41 kWh/a   | <b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>  | 71 dBA   |
| <b>Energy efficiency class (EEC)</b>   | A+         | <b>Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)</b> | 72 dBA   |
| <b>Fluid Dynamic Efficiency (FDE)</b>  | 36,2       | <b>Power Consumption in Off mode (Po)</b>   | 0,49 W   |
| <b>Fluid Dynamic Efficiency class (FDEC)</b>   | A          | <b>Power consumption in stand-by mode (Ps)</b>  | 0,99 W   |
| <b>Lighting Efficiency (LE)</b>  | 34,8 lux/W | <b>Time increase factor (F)</b>   | 0,7      |
| <b>Lighting Efficiency Class (LEC)</b>   | A          | <b>Energy Efficiency Index</b>  | 41,2     |
| <b>Grease Filtering Efficiency (GFE)</b>   | 64,3 %     | <b>Measured air flow rate at best efficiency point (Qbep)</b>                         | 403 m³/h |
| <b>Grease Filtering Efficiency Class (GFEC)</b>  | E          | <b>Measured air pressure at best efficiency point (Pbep)</b>                          | 479 Pa   |
| <b>Air flow at mininum speed (Qmin)</b>  | 277 m³/h   | <b>Measured electric power input at best efficiency point (Wbep)</b>                  | 148 W    |
| <b>Air flow at maximum speed (Qmax)</b>  | 636 m³/h   | <b>Nominal Power consumption of the light system (WL)</b>                             | 5 W      |
| <b>Air flow at boost speed (Qboost)</b>  | 782 m³/h   | <b>Average illumination of the light on the cooking surface (Emiddle)</b>             | 139 lux  |
| <b>Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)</b> | 50 dBA     | <b>Sound power level at highest setting (Lwa)</b>                                     | 71 dBA   |





## Electrical Connection

|                              |             |                           |          |
|------------------------------|-------------|---------------------------|----------|
| Plug                         | Not present | Frequency (Hz)            | 50-60 Hz |
| Electrical connection rating | 279 W       | Power supply cable length | 1500 mm  |
| Voltage                      | 220-240 V   |                           |          |

## Also available

Alternative colours available Neptune Grey

Available colours KV194G

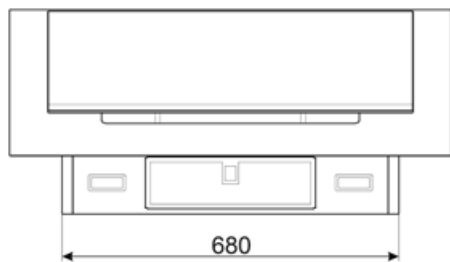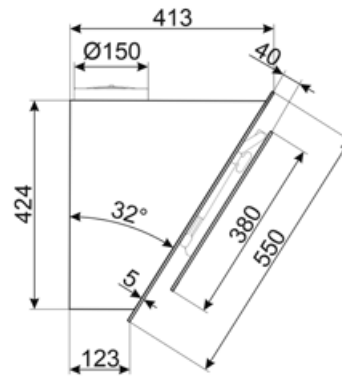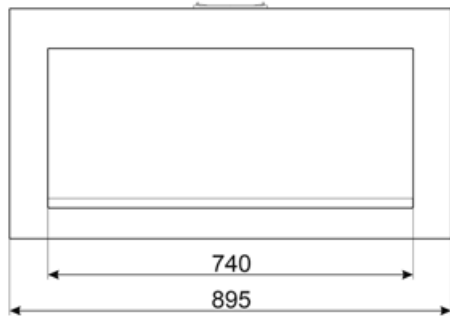

---

## Not included accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITCMNKVX

Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITCMNKVMB













Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITFCKV1

Kit 2 pcs Charcoal Filter for Hood KV1\*series. Dishwasher-safe. Size 320x80 mm and 280 x280 mm.

## Symbols glossary

- |   |   |  |  |
|---|---|--|--|
|   | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |   | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.  |
|   | Connection between hob and hood   |   | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.             |
|   | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.                             |   | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |
|   | Dimmering Lights  |   | Warning light(s): to advise when filters need changing.  |
|   | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.   |   | Perimeter extraction panels: very efficient and aid noise reduction.   |
|  | Tunable white from warm to cold   |  | Intensive/turbo setting: when extra fast extraction is required.   |