

# PGF32I-1



Product Family  
Built-in  
Dimensions  
Power supply  
Type  
EAN code

Hob  
Ultra-low profile  
30 cm  
Electric  
Induction  
8017709161941



## Aesthetics



Aesthetics	Classic
Colour	Stainless steel/Black
Finishing	Brushed
Material	Stainless Steel
Type of steel	Brushed
Frame	Yes
Frame colour	Stainless Steel
Type of control setting	Control knobs
Control knobs position	Front
No. of controls	2
Controls colour	Steel effect
Serigraphy colour	Black

## Program / Functions

No. of induction cook zones	2
Total no. of cook zones	2

## Options



Standard cut out	494x292 mm	Control Lock / Child Safety	Yes
------------------	------------	-----------------------------	-----

## Technical Features




Front centre - Induction - single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Rear centre - Induction - single - 1.80 kW - Booster 3.00 kW - Ø 21.0 cm

<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overheat</b>	Yes
<b>Automatic pan detection</b>	Yes	<b>Residual heat indicator</b>	Yes
<b>Minimum pan diameter indication</b>	Yes	<b>Protection against accidental start up</b>	Yes

## Electrical Connection

<b>Nominal power (W)</b>	3500 W	<b>Type of electric cable</b>	Single phase
<b>Current</b>	16 A	<b>Frequency (Hz)</b>	50/60 Hz
<b>Voltage (V)</b>	220-240 V	<b>Power supply cable length</b>	120 cm

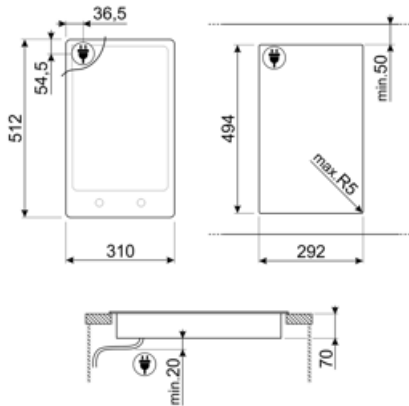

---

## Not included accessories

---

### 6MP1PGF

6 Linea knobs for PGF hobs



### SCRP

Induction and ceramic hobs and  
teppanyaki scraper

### LGPGF-1

Aluminium connecting strip for PGF



---

## Symbols glossary

---



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Knobs control