

# KSET999XE

Product family Hood

Hood Type Telescopic Cooker Hoods

**Design** Telescopic

**Extraction** Ducted out or re-circulation possible

Material Stainless steel

Type of steel Brushed

**EAN code** 8017709235123

Hood width 90 cm
Aesthetics Universal
Colour Silver
Serigraphy colour Black
Logo Silk screen



#### **Controls**

Control setting Buttons

### **Program / Functions**

No. of speeds 3

#### **Technical Features**





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight power2.5 WVent outlet150 mmLight colour3500 KMinimum distance from<br/>650 mm

temperature scale (K) GAS hob

Free outlet maximum 664 m³/h Minimum distance from 430 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	256	46
Speed 2	377	55



#### **Accessories Included**

Tube reduction Yes

## Performance / Energy Label

	Ar-
	4

**Annual Efficiency** 39 kWh/year Consumption (AEChood) Energy efficiency class ( A EEC) Fluid Dynamic Efficiency 33.5 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 29 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 66 % Efficiency (GFE) **Grease Filtering** D Efficiency Class (GFEC) Air flow at minumum 256 m<sup>3</sup>/h

Air flow at minumum 256 m³/h speed (Qmin)

Maximum extraction 647 m³/h rate

Airbourne acouistical A- 46 dBA weighted sound Power Emission at minimum speed (SPEmin)
Airborne acoustical A- 67 dBA weighted sound Power Emission at maximum

speed (SPEmax)
Time increase factor (F) 1.00
Measured air flow rate 336 m³/h
at best efficiency point
(Qbep)

434 Pa

Measured air pressure

at best efficiency point
(Qbep)

Measured electric 121 W
power input at best
efficiency point (Wbep)

Normal Power of the 5 W
light system (WI)

Average illumination of 145 lux

the light on the cooking surface (Emiddle) Sound power level at 67 dBA highest setting (Lwa)


### **Electrical Connection**


Nominal power 205 W Voltage 220-240 V Frequency (Hz) 50-60 Hz
Power supply cable 1000 mm
length


## **Optional accessories**

Charcoal filter KITFC400 Non return valve Yes







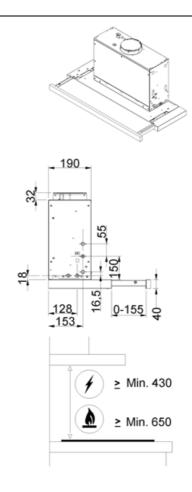



# **Compatible Accessories**



KITFC400

Charcoal filters Kit 2 pieces



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.