ALFA1035HR-2



Família	Fornos
Subfamília	Forno de convecção 10 bandejas EN 600x400 mm, GN 1/1 (min. H 20 mm)
Tipo de energia	Elétrico
Tipo de forno	Forno de convecção com humidificação
Controlo do forno	Controlo mecânico da temperatura
Capacidade de tabuleiro	10 bandejas EN 600x400 mm, 10 bandejas GN1/1 (mín. H 20 mm)
Fonte de energia	400 V 3N~ / 23A / 16 kW / 50 Hz
Memória de programas	Não disponível
Geração de humidade	Direto na cavidade
Pés reguláveis em altura	Sim
Dimensões do produto (LxPxA)	798x772x1100 mm
Profundidade máxima com a porta aberta	1536 mm

Mercado

Indústrias	Bares, Cafés e Pubs, Hotelaria, Restaurantes, Padarias / Pastelarias, Talhos, Catering, Estabelecimentos de Cuidados, Indústrias Alimentares, Supermercados / Comércio de alimentos

Design

Porta com tiras em aço inox	Sim	**Painel frontal**	Sim
Cor	Aço inox	**Design**	Alfa

Comandos

Temporizador	1-99 min + Sem fim	**Regulação da chaminé**	Manual

Opções

Dobradiça à direita	Sim	**Exaustor compatível**	K4610X (com kit de conexão KITPO45)

Ligação elétrica


Potential equalisation	Yes

ESPECIFICAÇÕES TÉCNICAS

Material do forno	Aço Inox / Vidro / Plástico
Dimensões da cavidade (LxPxA)	672x437x854 mm
Volume bruto	289,8 lt
Volume útil	258,9 lt
Volume útil interno	199,1 lt
Material da cavidade	Aço inox
Níveis de tabuleiros	10
Suporte dos tabuleiros	Cromado
Distância entre tabuleiros	77 mm
Material da porta	Vidro duplo
Abertura da porta	Lateral - dobradiça à direita
Tipo de puxador	Rotativo
Vidro	Abre com dobradiça
Tipologia da ventoinha	3 com rotação reversível temporizada
Potência da ventoinha	180W
RPM da ventoinha	Velocidade única
RPM standard da ventoinha	2850 rpm
Injeção de água em cada ventoinha	Sim
Níveis de humidificação	Manual
Posição de exaustão	Traseira
Tipo de temporizador	Elétrico
Temperaturas	50-270°C
Aviso de final de cozedura	Sim
Luz indicadora (laranja) de temperatura atingida	Sim
Luz indicadora (verde) de tempo atingido	Sim
Interruptor de segurança com porta aberta	Sim
Reset de segurança do termostato	Sim
Deflector removível	Sim
Iluminação	3 lâmpadas de halogéneo
Potência das lâmpadas	40 W
Tubo de carga de água	Sim
Pressão da entrada de água	50-500 kPa (min-max)
Comprimento do cabo de alimentação	170 cm
Painel traseiro	Porta galvanizada
Proteção IPX	IPX3

Dados de logística

Dimensões do produto embalado (LxPxA)	960x890x820 mm
Código EAN	8017709272838
Peso líquido (kg)	101,000 kg
Peso bruto (kg)	122,000 kg

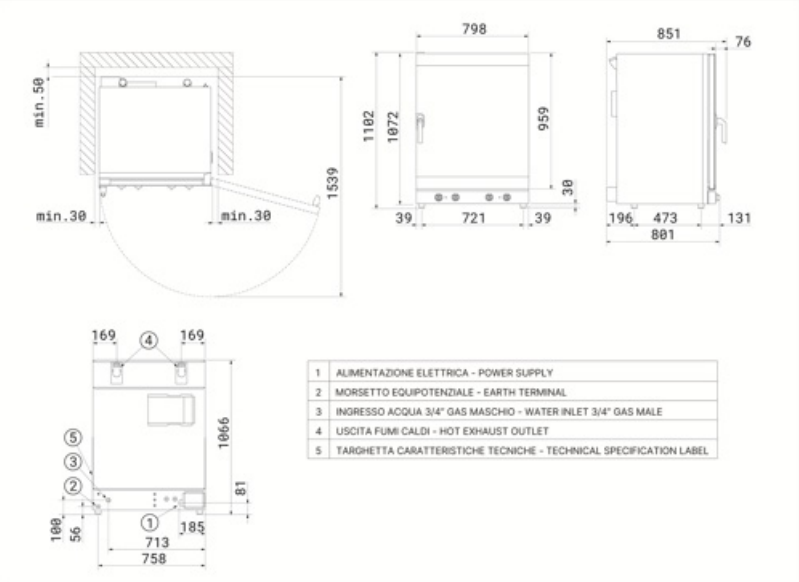

1	ALIMENTAZIONE ELETTRICA - POWER SUPPLY
2	MORSETTO EQUIPOTENZIALE - EARTH TERMINAL
3	INGRESSO ACQUA 3/4" GAS MASCHIO - WATER INLET 3/4" GAS MALE
4	USCITA FUMI CALDI - HOT EXHAUST OUTLET
5	TARGHETTA CARATTERISTICHE TECNICHE - TECHNICAL SPECIFICATION LABEL

Acessórios Compatíveis



3743




3751

Kit of 4 flat perforated aluminium tray EN 600×400 mm



3805

Kit of 4 chrome-plated wire grids EN 600×400 mm



3810



3927

Air flow reducer kit for ovens ALFA410, 420, 625, 1035



RGN11-1035-2

Support rack for GN 1/1 flat trays, suitable for ALFA1035 models



RUTVL

Set of 4 wheels, fits all professional oven tables



T11TH20

GN1/1 non-stick tray, 20 mm height



T11TH40

GN1/1 non-stick tray, 40 mm height




T11XH20

Aluminium GN1/1 tray, 20 mm height




T11XH65

GN1/1 aluminium tray, 65 mm height



TF11XH2

GN 1/1 perforated aluminium tray, 20 mm height



TMF11TH2

GN 1/1 non-sticking microperforated tray, 20 mm height



TVL425D

4-level tray holder rack for ALFA410/ALFA420/ALFA425 (stacked) or ALFA1035 ovens, dim. (WxDxH) 800x800x504 mm (hieight with kit RUTVL: 602 mm)

Alternative products



ALFA1035H-2

Cor: Aço inox

Symbols glossary



Elétrico: a fonte de energia do forno é a eletricidade.



Fan forced heating



Fan forced heating with humidity injection

Benefit (TT)

Mechanical control panel

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released.
In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

Hinged opening

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.

Humidity management

Impeccable cooking thanks to precise humidity control

Thanks to the effective management of small amounts of humidity, perfect browning can be achieved while maintaining the product's softness and promoting the development of its internal structure. Different humidity levels can be set, which determine the frequency of activation cycles. Each cycle consists of two seconds of water vapour spraying inside the cooking chamber, followed by a 15-second pause.