


HOB482D

Product Family	Hob
Built-in	Ultra-low profile or Fully Flushed
Dimensions	80 cm
Power supply	Electric
Type	Induction with integrated hood
Extraction	Expulsion
Electronic control	Yes
EAN code	8017709288631
Energy efficiency class (EEC)	A++



Aesthetics

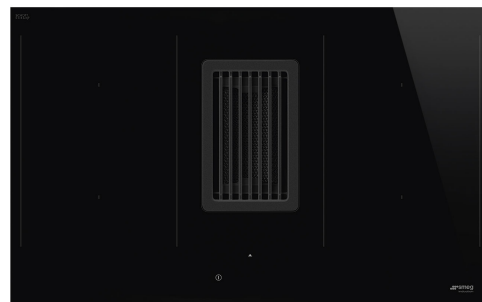

Aesthetics	Universal
Colour	Black
Finishing	Glass
Material	Glass
Glass Type	Ceramic
Glass edge	Straight edge
Pan stands	Cast iron
Type of control setting	Compact EVO Slider
Slider	Yes
Slider	Red
Control knobs position	Front
Serigraphy colour	Grey

Programs / Functions



Total no. of cook zones	4
No. of induction cook zones	4
Time-setting options	Automatic switch-off
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Auto-Vent 2.0	Yes

Options



Multizone Option	Yes	Residual time indicator	Yes
Flexible Zone Type	MultiZone	Limited Power	Yes advance
Standard cut out	482-483x765-766 mm	Consumption Mode	
Keep warm automatic function	Yes	Limited Power Consumption Mode in W	2800, 3500, 4500, 7400 W
End cooking timer	4	Show Room Demo Option	Yes
Pause option	Yes	Control Lock / Child Safety	Yes
Minute minder	1	Cleaning option	Yes
End of cooking acoustic alarm	Yes	Quick start	Yes
		Rapid level selection	Yes

Technical Features



Front left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm			
Rear left - Induction - multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm			
Rear right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm			
Front right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm			
Multizone left - Booster 3.70 kW - 39.0x21.0 cm			
Multizone right - Booster 3.70 kW - 39.0x21.0 cm			
Automatic setting according to pan dimension	Yes	Automatic switch off when overflow	Yes
Automatic pan detection	Yes	Residual heat indicator	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	Protection against accidental start up	Yes

Accessories Included

Other accessories	Extraction and Filtering Kit inc tubes and Charcoal filter
--------------------------	--

Electrical Connection

Nominal power (W)	7620 W	Type of electric cable	Universal
Current	33 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm
Voltage 2 (V)	380-415 V	Terminal Box	6 poles

Controls (hood)

Hood control setting	Touch Capacitive
Led colour	Red

Display	Yes
---------	-----

Programs / Functions (hood)

No. of speeds	8
Intensive speed	2
Other functions	AUTOVENT

Hood time setting	Delay
Other options	Kit for Recirculation and Extraction included

Technical Features (Hood)

Free outlet maximum capacity	750 m³/h
Motor power	220 W
No. of filters	1

Anti-grease filters	Stainless steel
Charcoal filters included	YES, regenerable
Filter replacement indicator	Yes

Performance / Energy Label (hood)

Fluid Dynamic Efficiency (FDE)	37,60
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	0,0 lux/W
Lighting Efficiency Class (LEC)	NA
Grease Filtering Efficiency (GFE)	85,1 %
Grease Filtering Efficiency Class (GFEC)	B
Air flow at mininum speed (Qmin)	245 m³/h
AIR FLOW AT MAXIMUM SPEED (QMAX)	505 m³/h
Air flow at boost speed (Qboost)	700 m³/h
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	51 dB(A)

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dB(A)
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dB(A)
Power Consumption in Off mode (Po)	0,49 W
Time increase factor (F)	0,6
Energy Efficiency Index per first cavity	32,8
Measured air flow rate at best efficiency point (Qbep)	328 m³/h
Measured air pressure at best efficiency point (Qbep)	540 Pa
Measured electric power input at best efficiency point (Wbep)	131 W
Sound power level at highest setting (Lwa)	65 dB(A)

Speed 1

Extraction rate IEC 61591	245 m³/h
Noise level IEC 60704-2-13	51 dB(A)
Pressure	290 Pa
Power	35 W

Speed 2

Extraction rate IEC 61591	285 m³/h
Noise level IEC 60704-2-13	55 dB(A)
Pressure	370 Pa
Power	45 W

Speed 3

Extraction rate IEC 61591	350 m³/h
Noise level IEC 60704-2-13	57 dB(A)
Pressure	525 Pa
Power	65 W

Speed 4

Extraction rate IEC 61591	380 m³/h
Noise level IEC 60704-2-13	59 dB(A)
Pressure	530 Pa
Power	75 W

Speed 5

Extraction rate IEC 61591	410 m³/h
Noise level IEC 60704-2-13	62 dB(A)
Pressure	535 Pa
Power	85 W

Speed 6

Extraction rate IEC 61591	445 m³/h
Noise level IEC 60704-2-13	63 dB(A)
Pressure	540 Pa
Power	105 W

Speed 7

Extraction rate IEC 61591	475 m³/h
Noise level IEC 60704-2-13	64 dB(A)
Pressure	545 Pa
Power	115 W

Speed 8


Extraction rate IEC 61591	505 m³/h
Noise level IEC 60704-2-13	65 dB(A)
Pressure	550 Pa
Power	130 W

Intensive speed


Extraction rate (IEC 61591)	550 m³/h
Noise level IEC 60704-2-13	66 dB(A)
Pressure	555 Pa
Power	140 W

Intensive Speed 2

Extraction rate IEC 61591	700 m³/h
Noise level IEC 60704-2-13	72 dB(A)
Pressure	560 Pa
Power	220 W

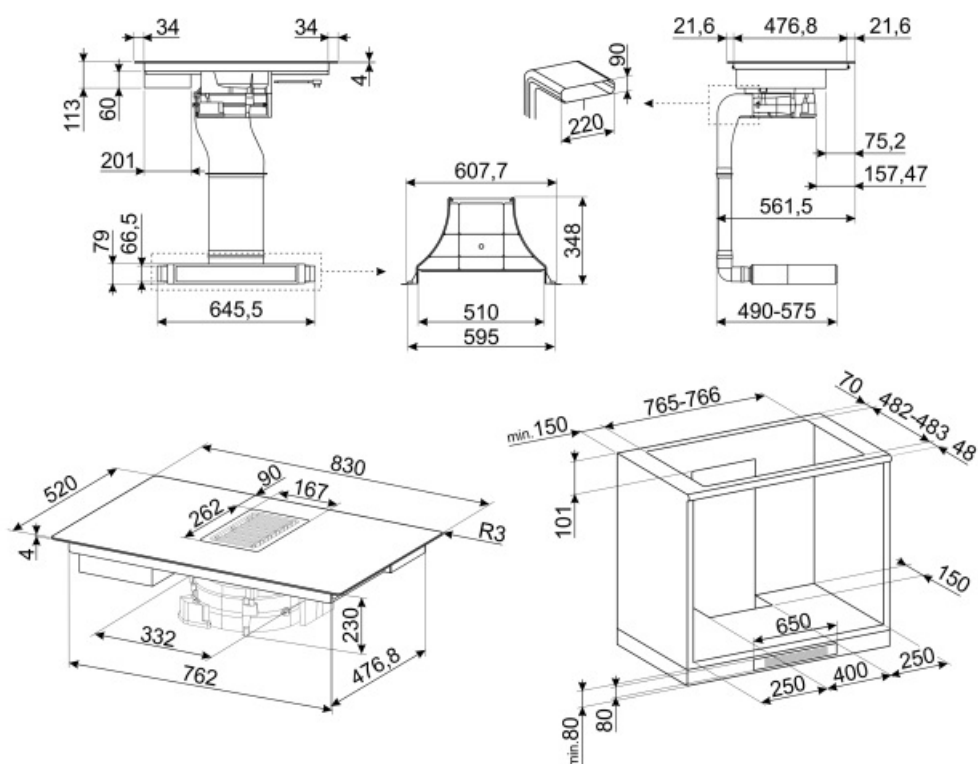

Not included accessories



KITF6HOB D

Recirculating kit for Hobd: tubes + regenerable anti-odor filter + grid in stainless steel with magnetics fix (easy to remove) that fit in a plinth of min. 6 cm



CON60H

Flat duct connector for tubes 220*60 mm. It helps to connect more tubes of the kit KITEHOB D4



GRI60H

Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



KITEHOB D4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve



FLTHOB D

Ceramic Anti Odour Filter regenerable as spare part suitable for Recirculating kit (accessory KITF6HOB D) of the hob with integrated hood models HOBD682D and HOBD682R



RED60H

Reducer from 90 to 60 mm



TPK


















Stainless steel grill plate to cook Teppanyaki dishes



FLTHOB D4

Charcoal Anti Odour Filter regenerable as spare part suitable for HOBD482D

Symbols glossary

	...		...
	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Heavy duty cast iron pan stands: for maximum stability and strength.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		The slider control panel allows you to adjust the power simply by passing your finger across the touch device.
	Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.		Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		PAUSE_72dpi
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		...
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	Compact Slider back-lighted ghost effect		