KCU94X

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709367831
Hood width	90 cm
Aesthetic	Portofino
Colour	Stainless steel
Finishing	Polished/Satin
Components finishing	Stainless steel
Logo	Applied



Controls

Control setting	Touch control back-lighted White

Program / Functions

No. of speeds	3
Intensive speed	
Auto-vent 2.0	
Auto-vent 2.0	

Technical Features



Buffle filters	Yes
No. of lights	2
Light type	LED
Light Power	2 W
Dimmer mode	Yes
Light color temperature scale (K)	4000 K
Free outlet maximum capacity	815 m³/h

Motor power	275 W
No. of filters	3
Anti-grease filters	Stainless steel
Vent outlet	150 mm
Minimum distance from GAS hob	750 mm
Minimum distance from ELECTRIC hob	650 mm
Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	237	43
Speed 2	403	56
Speed 3	577	64
Intensive speed	741	70

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	34 kWh/a
Energy efficicency class (EEC)	A++
Fluid Dynamic Efficiency (FDE)	39,6
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	33 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	92,6 %
Grease Filtering Efficiency Class (GFEC)	B
Air flow at minumum speed (Qmin)	237 m³/h
Air flow at maximum speed (Qmax)	577 m³/h
Air flow at boost speed (Qboost)	741 m³/h


Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	43 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Time increase factor (F)	0,6
Energy Efficiency Index	34,4
Measured air flow rate at best efficiency point (Qbep)	343,8 m³/h
Measured air pressure at best efficiency point (Pbep)	389 Pa
Measured electric power input at best efficiency point (Wbep)	93,9 W
Nominal Power consumption of the light system (WL)	4,6 W
Average illumination of the light on the cooking surface (Emiddle)	152 lux
Sound power level at highest setting (Lwa)	66 dBA

Electrical Connection

Electrical connection rating	277 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz
Power supply cable length	1000 mm
Plug	No

Also available

Alternative colours availible	White, Stainless steel, Anthracite, Yellow, Green, Red, Orange	**Available colours**	KPF9WH-KPF9X-KPF9AN-KPF9YW-KP9OG-KPF9RD-KPF9OR

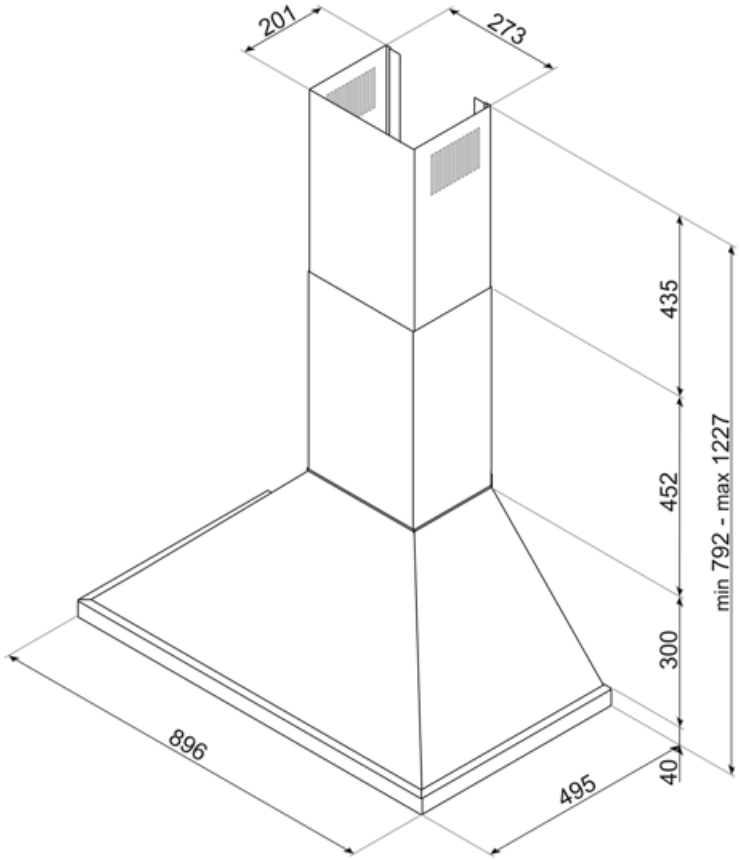

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCGT94

Regenerable charcoal filters, Kit 3 pieces

Alternative products



KCU94AN

Colour: Anthracite



KCU94BL

Colour: Black



KCU94SBM

Colour: Storm Blue



KCU94WH

Colour: White



KCU94EGM

Colour: Emerald Green



KCU94ACM

Colour: Amber Clay



KCU94MLM

Colour: Moonlight

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A++: Energy efficiency class A++ helps to save up to 20% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Intensive/turbo setting: when extra fast extraction is required.



V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.



Connection between hob and hood



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Dimmering Lights