

## **KD61XE3**

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Stainless steel
Type of steel Brushed

EAN code 8017709345983

Hood width 60 cm
Aesthetic Universale
Colour Stainless steel

Finishing Satin
Logo Embossed



## **Controls**

Control setting Buttons

## **Program / Functions**

No. of speeds 3

### **Technical Features**





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power4 WVent outlet150 mmLight color temperature4000 KMinimum distance from650 mm

scale (K) GAS hob

Free outlet maximum 620 m³/h Minimum distance from 500 mm

capacity ELECTRIC hob

Motor power 160 W

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	260	45
Speed 2	390	54



Speed 3	600	63
------------	-----	----

### Accessories included

Tube reduction Yes

## Performance / Energy Label

1	A.
١.	Ţ

**Annual Efficiency** 79 kWh/a Consumption (AEChood) Energy efficieency class C (EEC) Fluid Dynamic Efficiency 18.20 (FDE) Fluid Dynamic Efficiency C class (FDEC) Lighting Efficiency (LE) 17 lux/W Lighting Efficiency Class C (LEC) **Grease Filtering** 75.1 % Efficiency (GFE) **Grease Filtering** С Efficiency Class (GFEC) Air flow at minumum 260 m<sup>3</sup>/h speed (Qmin) Air flow at maximum 600 m<sup>3</sup>/h speed (Qmax)

Airbourne acouistical A- 45 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-63 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Time increase factor (F) 1.3 **Energy Efficiency Index** Measured air flow rate 338 m<sup>3</sup>/h at best efficiency point (Qbep) Measured air pressure 300 Pa at best efficiency point (Pbep) Measured electric 155 W power input at best efficiency point (Wbep) **Nominal Power** 8 W consumption of the light system (WL) Average illumination of 133 lux the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa)

#### **Electrical Connection**

Electrical connection 168 W

rating

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable


length

Plug Not present

63 dBA

1500 mm



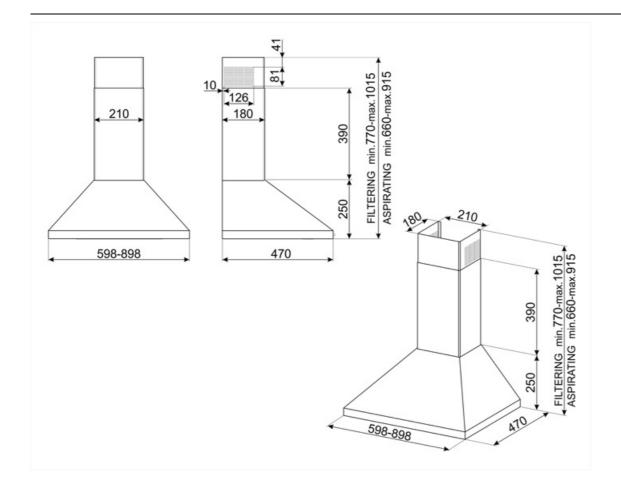



# **Compatible Accessories**

#### KITFC152

Charcoal filters Round Kit 2 pieces





## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.