

KDC61XE3

Product family Hood

Hood Type Decorative wall hood

Design Chimney Extraction Extraction Material Stainless steel Type of steel Brushed

EAN code 8017709345990

Aesthetic Universale Stainless steel Colour

Finishing Satin Logo **Embossed**



Controls

Control setting Buttons

Program / Functions

No. of speeds 3

Technical Features







2 No. of filters 2 No. of lights

LED Aluminium Light type Anti-grease filters

Charcoal filters included Yes **Light Power** 4 W 150 mm Light color temperature 4000 °K Vent outlet scale (°K) Minimum distance from 650 mm

Free outlet maximum 620 m³/h **GAS** hob

capacity Minimum distance from 500 mm

160 W Motor power **ELECTRIC hob**

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	260	45
Speed 2	390	54



Speed 3	600	63
------------	-----	----

Accessories included

Tube reduction Yes

Performance / Energy Label

1	A***
	4

Annual Efficiency 79 kWh/a Consumption (AEChood) Energy efficieency class C (EEC) Fluid Dynamic Efficiency 18,20 (FDE) Fluid Dynamic Efficiency C class (FDEC) Lighting Efficiency (LE) 17 lux/W Lighting Efficiency Class C (LEC) **Grease Filtering** 75,1% Efficiency (GFE) **Grease Filtering** С Efficiency Class (GFEC) Air flow at minumum 260 m³/h speed (Qmin) Air flow at maximum 600 m³/h speed (Qmax)

Airbourne acouistical A- 45 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-63 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Time increase factor (F) 1,3 **Energy Efficiency Index** 75.6 Measured air flow rate 338 m³/h at best efficiency point (Qbep) Measured air pressure 300 Pa at best efficiency point (Pbep) Measured electric 155 W power input at best efficiency point (Wbep) Nominal Power 8 W consumption of the light system (WL) Average illumination of 133 lux the light on the cooking

surface (Emiddle)

Sound power level at

highest setting (Lwa)


63 dBA

Electrical Connection

Plug Not present Frequency (Hz) 50-60 Hz
Electrical connection 168 W Power supply cable 1500 mm length

Voltage 220-240 V



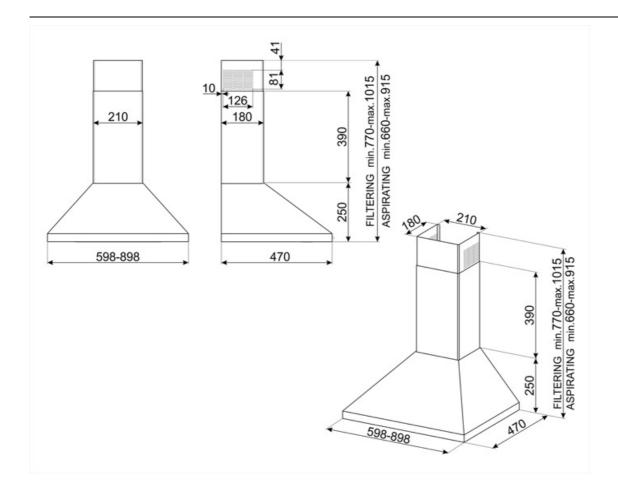



Compatible Accessories

KITFC152

Charcoal filters Round Kit 2 pieces





Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

C | A ---