

# KDD60VXE-2



Product family	Hood
Hood Type	DownDraft
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709223182
Hood width	60 cm
Aesthetic	Universale
Colour	Black
Finishing	Satin
Glass Type	Black
Serigraphy colour	White
Logo	Silk screen






## Controls



Control setting	Touch control	Display	Digital
Led color	Red		

## Program / Functions

No. of speeds	4
Intensive speed	
24h air filter function	
Time-setting options	

## Technical Features



Remote motor	KITRBDD - Kit Optional	Free outlet maximum capacity	590 m <sup>3</sup> /h
No. of lights	1	Motor power	270 W
Light type	LED	No. of filters	2
Light Power	7 W	Anti-grease filters	Aluminium
Dimmer mode	Yes	Filter replacement indicator	Yes
Light color temperature scale (K)	4000 K		

Vent outlet

150 mm

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	135	44
Speed 2	230	52
Speed 3	295	57
Speed 4	375	62
Intensive speed	570	71

## Accessories included

Motorised opening

Yes

Tube reduction

Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEC<sub>hood</sub>) 73 kWh/a

Energy efficiency class (EEC) B

Fluid Dynamic Efficiency (FDE) 22.4

Fluid Dynamic Efficiency class (FDEC) C

Lighting Efficiency (LE) 29 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 55.1 %

Grease Filtering Efficiency Class (GFEC) E

Air flow at minimum speed (Q<sub>min</sub>) 135 m<sup>3</sup>/h

Air flow at maximum speed (Q<sub>max</sub>) 295 m<sup>3</sup>/h

Air flow at boost speed (Q<sub>boost</sub>) 570 m<sup>3</sup>/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE<sub>min</sub>) 44 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE<sub>max</sub>) 57 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPE<sub>boost</sub>) 71 dBA

Time increase factor (F) 1.2

Energy Efficiency Index 69.9

Measured air flow rate at best efficiency point (Q<sub>bep</sub>) 293 m<sup>3</sup>/h

Measured air pressure at best efficiency point (P<sub>bep</sub>) 429 Pa

Measured electric power input at best efficiency point (W<sub>bep</sub>) 156 W

Nominal Power consumption of the light system (WL) 7 W


Average illumination of the light on the cooking surface (E<sub>middle</sub>) 200 lux

Sound power level at highest setting (L<sub>wa</sub>) 57 dBA

## Electrical Connection

---

Electrical connection rating	277 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	(F;E) Schuko
Frequency (Hz)	50-60 Hz		

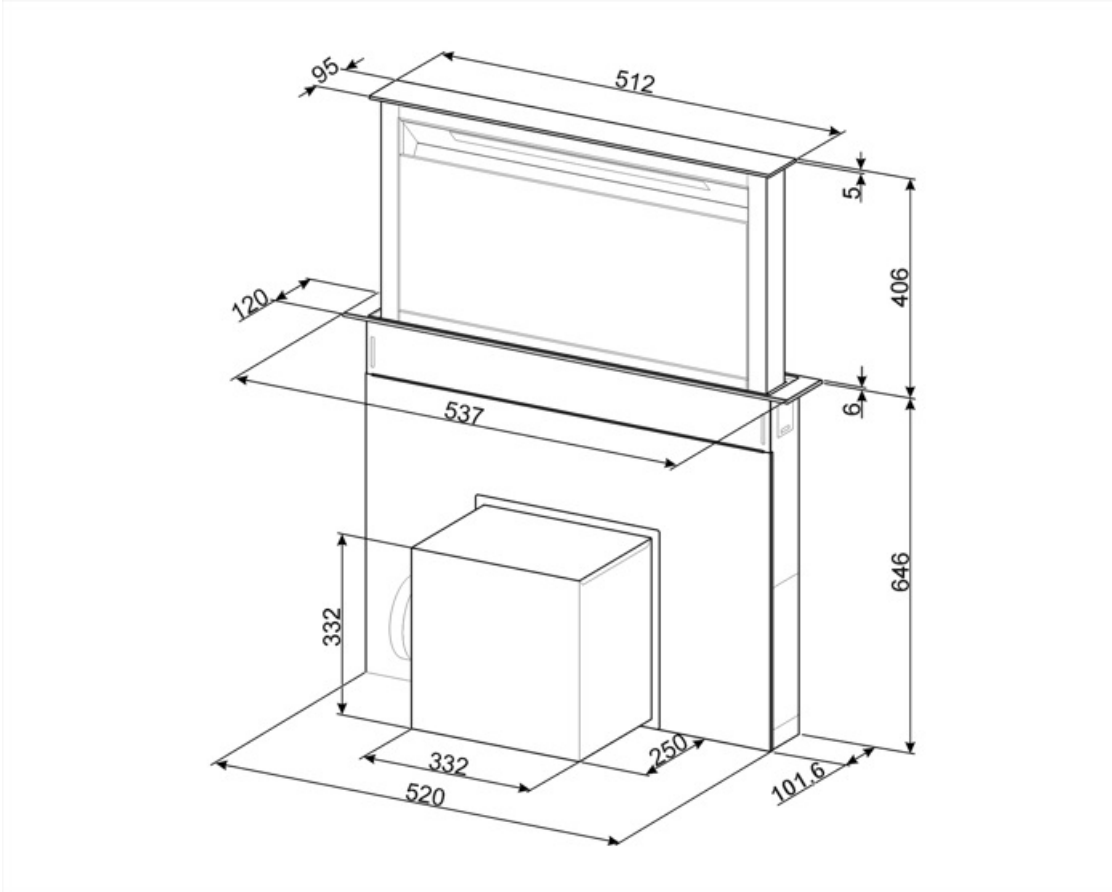

---

## Compatible Accessories

---



### KITFCDD60

Charcoal filter for hood Down Draft Kit 2 pieces Dishwasher safe



### KITVENT150

Motor inlet 150 mm with check valve














### KITRBDD

kit remote blower for DD hood. Cable length: 7 meters.

### RCKF2

Remote control

## Symbols glossary

- |                                                                                  |                                                                                                                                                           |                                                                                   |                                                                                                               |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.       |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.                        |  | Electronic display: to give a visual reminder of the options selected.                                        |
|  | Warning light(s): to advise when filters need changing.                                                                                                   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Perimeter extraction panels: very efficient and aid noise reduction.                                                                                      |  | Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.     |
|  | Intensive/turbo setting: when extra fast extraction is required.                                                                                          |  | Dimmering Lights                                                                                              |
|  |                                                                                                                                                           |                                                                                   |                                                                                                               |