


KDD90CNE2



Product family	Hood
Tipo de Exaustor	Fully Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Painted material
EAN code	8017709346126
Aesthetic	Universal
Colour	Black
Acabamento	Glass
Glass Type	Black
Cor da serigrafia	Serigrafia em cinza
Logotipo	Logotipo serigrafado



Controls



Control setting	Touch control	Display	Digital
Led color	White		

Program / Functions

No. of speeds	4
Intensive speed	
24h air filter function	
Other functions	Delay_function
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	Motor power	250 W
Remote motor	KITRBDD - Kit Optional	No. of filters	2
No. of lights	1	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	No
Light Power	5 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm

Escala de temperatura de cor clara (°K)	4000 °K	Non return valve	No
Free outlet maximum capacity	740 m³/h		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	200	43
Speed 2	280	49
Speed 3	350	53
Speed 4	440	57
Intensive speed	720	68

Accessories Included

Remote control	Optional	Tube reduction	Yes
Sliding door	Yes		

Performance / Energy Label




Consumo anual de energia (CAE exaustor)	57 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	53 dBA
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Fluid Dynamic Efficiency (FDE)	29,30	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	40 lux/W	Energy Efficiency Index	53,1
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	398 m³/h
Grease Filtering Efficiency (GFE)	65,1 %	Measured air pressure at best efficiency point (Pbep)	429 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	162 W
Air flow at minumum speed (Qmin)	200 m³/h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	350 m³/h	Average illumination of the light on the cooking surface (Emiddle)	200 lux
Air flow at boost speed (Qboost)	720 m³/h	Sound power level at highest setting (Lwa)	49 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	43 dBA		

Electrical Connection

Plug	(F;E) Schuko	Frequency (Hz)	50-60 Hz
Electrical connection rating	255 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

Also available

Outras cores disponíveis Branca, Vidro Silver

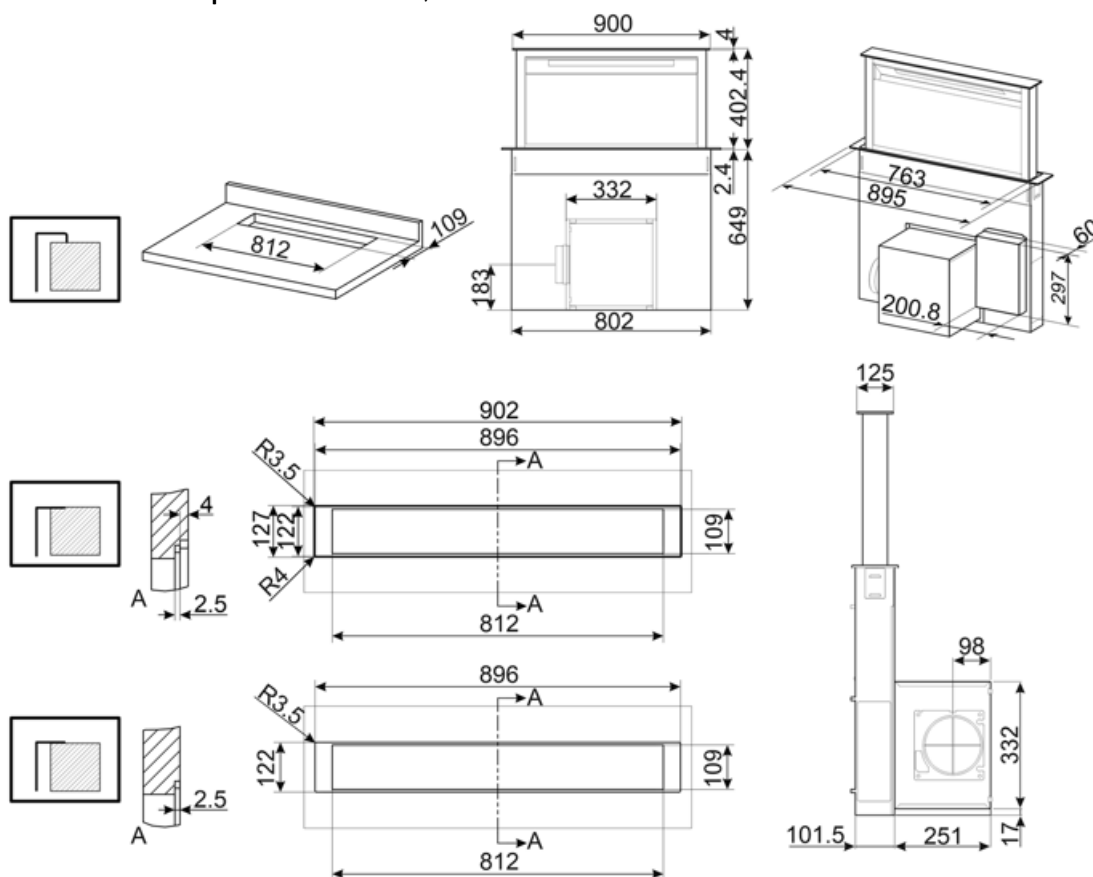

Compatible Accessories



KITFCDD

Filtro de carvão para exaustor de bancada Kit 1 peça Pode ser lavado na máquina lava-louça














RCKF2

Comando à distância

KITRBDD

kit ventilador remoto para exaustor DD

Symbols glossary

	24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos
	Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.		Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.
	Visor eletrônico: para exibir um lembrete visual das opções selecionadas.		Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.
	Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.		Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.
	Controles táteis: O controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão.		Configuração intensiva/turbo: quando a extração extra rápida é necessária.
	Luzes de escurecimento		

Benefit (TT)

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones