

KDIAM90AX

| | |
|--------------------|---------------------------------------|
| Product family | Hood |
| Hood Type | Canopy Cooker Hoods |
| Design | Fully integrated |
| Extraction | Ducted out or re-circulation possible |
| Electronic control | Yes |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709217082 |
| Hood width | 90 cm |
| Aesthetics | Universal |
| Colour | Stainless steel |
| Finishing | Brushed |
| Logo | Embossed |



Controls

| | | | |
|-----------------|--------------------|------------|-------|
| Control setting | Electronic buttons | Led colour | White |
|-----------------|--------------------|------------|-------|

Program / Functions

| | |
|----------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| Time-setting options |  |

Technical Features




| | | | |
|------------------------------------|------------------------|------------------------------------|--------|
| No. of lights | 4 | Anti-grease filters | Baffle |
| Light type | LED | Filter replacement indicator | Yes |
| Light power | 1 W | Vent outlet | 150 mm |
| Light colour temperature scale (K) | 3000 K | Minimum distance from GAS hob | 750 mm |
| Free outlet maximum capacity | 1400 m ³ /h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 550 W | Non return valve | Yes |
| No. of filters | 2 | | |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 552 | 46 |

| | | |
|-----------------|------|----|
| Speed 2 | 950 | 63 |
| Speed 3 | 1412 | 71 |
| Intensive speed | 1555 | 74 |


Electrical Connection

| | | | |
|-----------------------|-----------|----------------------------------|---------------|
| Nominal power | 555 W | Power supply cable length | 1500 mm |
| Voltage | 220-240 V | Plug | (I) Australia |
| Frequency (Hz) | 50-60 Hz | | |

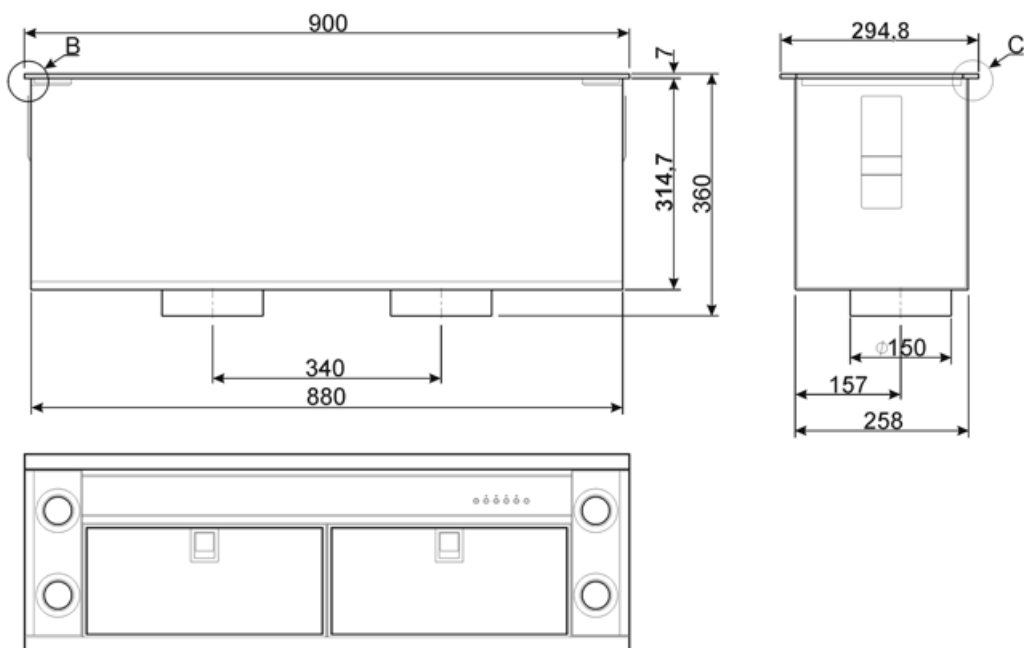

Compatible Accessories

AIRKITDIAM



air conveyor kit from the two hood motors in a single outlet with a diameter of 200 mm (the motors come out at 150 mm)

FLT6



Round Charcoal filters (kit 2 pieces)

Symbols glossary

- | | | | |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Intensive/turbo setting: when extra fast extraction is required. | | |