

# KDIAM90AX

Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709217082
Hood width	90 cm



## Aesthetics

Aesthetics	Universal	Finishing	Brushed
Colour	Stainless steel	Logo	Embossed

## Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

## Technical Features




No. of lights	4	Anti-grease filters	Baffle
Light type	LED	Filter replacement indicator	Yes
Light power	1 W	Vent outlet	150 mm
Light colour	3000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	1400 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	550 W	Non return valve	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	552	46
Speed 2	950	63

Speed 3	1412	71
Intensive speed	1555	74

## Electrical Connection

Plug	(I) Australia	Frequency (Hz)	50-60 Hz
Nominal power	555 W	Power supply cable length	1500 mm
Voltage	220-240 V		

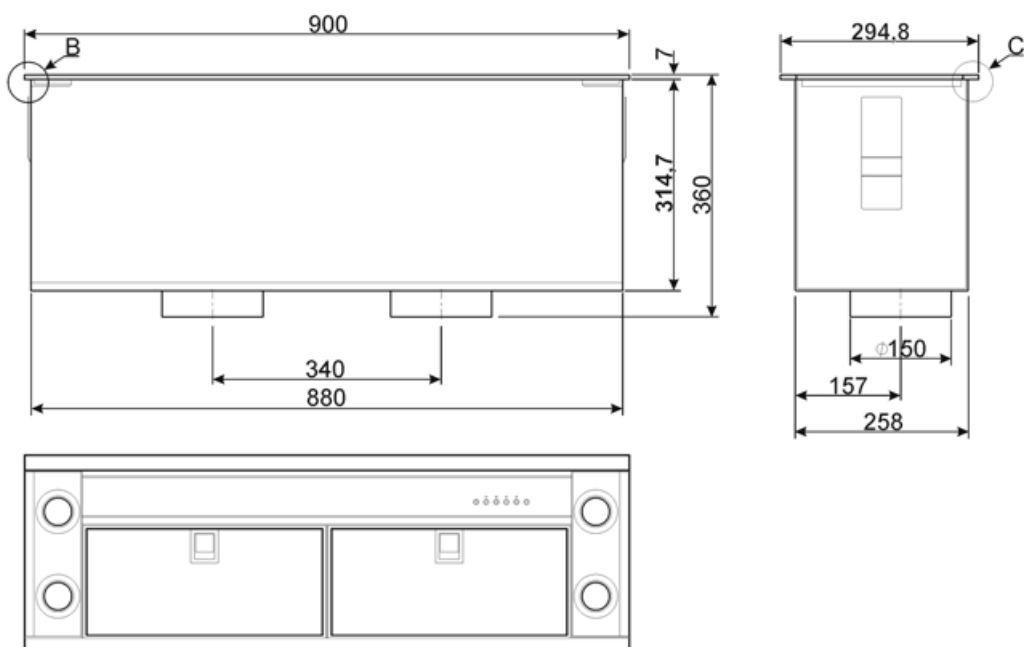

---

## Not included accessories

---


### FLT6

Round Charcoal filters (kit 2 pieces)



### AIRKITDIAM






air conveyor kit from the two hood motors in a single outlet with a diameter of 200 mm (the motors come out at 150 mm)



---

## Symbols glossary

---

- |  |   |   |  |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Intensive/turbo setting: when extra fast extraction is required.  |   |  |