

# KFAB84BL






Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Recirculation
Electronic control	Yes
Material	Painted material
Type of steel	Polished
EAN code	8017709361266
Hood width	75 cm
Aesthetic	50's Style
Colour	Black
Finishing	Glossy
Logo	Applied



## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	
V-Condense System	

## Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Stainless steel
Light Power	1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature scale (K)	4000 K	Minimum distance from GAS hob	650 mm
Light color temperature range	2700 - 4000 K	Minimum distance from ELECTRIC hob	650 mm

Free outlet maximum capacity	712 m <sup>3</sup> /h	Non return valve	Yes
Motor power	137 W		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	279	45
Speed 2	453	57
Speed 3	605	64
Intensive speed	682	65

## Accessories included



Charcoal filters included Yes

## Performance / Energy Label



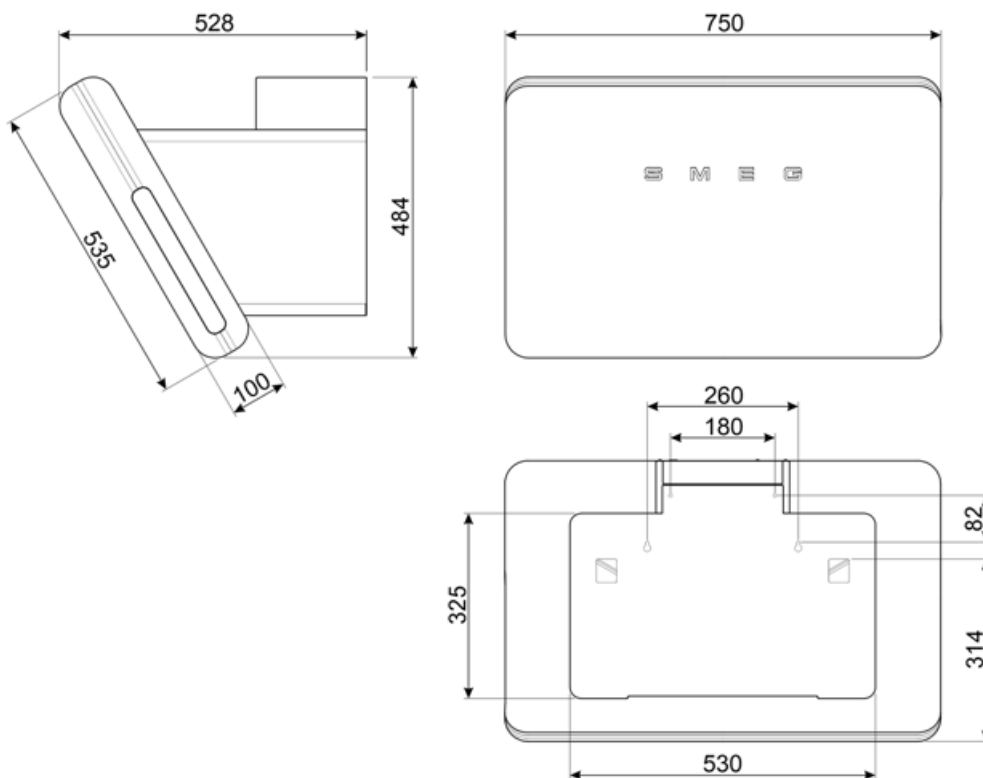
Annual Efficiency Consumption (AEChood)	47 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	30,1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	65 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	51,0 lux/W	Energy Efficiency Index	51,1
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	336 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	65,2 %	Measured air pressure at best efficiency point (Pbep)	443 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	137,3 W
Air flow at minumum speed (Qmin)	284 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	3 W
Air flow at maximum speed (Qmax)	620 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	153 lux
Air flow at boost speed (Qboost)	712 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	64 dBA

## Electrical Connection

Battery type		Frequency (Hz)	50-60 Hz
Electrical connection rating	282 W	Power supply cable length	1500 mm
Current	1 A	Plug	Not present
Voltage	220-240 V		

## Also available

Alternative colours available: Matt white, Matt Black, Cream



---

## Compatible Accessories

---













**FLT6**

Round Charcoal filters (kit 2 pieces)



**KITCMFABBL2**

## Symbols glossary

- |   |   |  |  |
|---|---|--|--|
|   | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |   | Energy efficiency class A  |
|   | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |   | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.         |
|   | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.                             |   | Warning light(s): to advise when filters need changing.  |
|   | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.   |   | Intensive/turbo setting: when extra fast extraction is required.   |
|   | Connection between hob and hood   |   | Dimmering Lights   |
|  | Tunable white from warm to cold.  |  | V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use. |