

KI52E3

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Material	Painted material
EAN code	8017709304362
Hood width	52 cm



Aesthetics

Aesthetic Colour	Universale Silver	Serigraphy colour Logo	Black Silk screen
------------------	-------------------	------------------------	-------------------

Controls

Control setting	Slider
-----------------	--------

Programme / Functions

No. of speeds	3
---------------	---

Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Aluminium
Light Power	4 W	Vent outlet	150 mm
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	350 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	115 W		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	160	54
Speed 2	220	59
Speed 3	335	66

Accessories Included

Tube reduction Yes

Performance / Energy Label






C

Annual Efficiency Consumption (AEChood) 59 kWh/a
Energy efficiency class (EEC) C
Fluid Dynamic Efficiency (FDE) 13,1
Fluid Dynamic Efficiency class (FDEC) D
Lighting Efficiency (LE) 13 lux/W
Lighting Efficiency Class (LEC) D
Grease Filtering Efficiency (GFE) 75,1 %
Grease Filtering Efficiency Class (GFEC) C
Air flow at minumum speed (Qmin) 160 m³/h
Air flow at maximum speed (Qmax) 335 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 54 dB(A)
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 66 dB(A)
Time increase factor (F) 1,5
Energy Efficiency Index 80,6
Measured air flow rate at best efficiency point (Qbep) 153 m³/h
Measured air pressure at best efficiency point (Pbep) 196 Pa
Measured electric power input at best efficiency point (Wbep) 103 W
Nominal Power consumption of the light system (WL) 8 W
Average illumination of the light on the cooking surface (Emiddle) 100 lux
Sound power level at highest setting (Lwa) 66 dB(A)

Electrical Connection

Plug UK 13 AMP
Electrical connection rating 103 W
Voltage 220-240 V
Frequency (Hz) 50 Hz
Power supply cable length 1000 mm

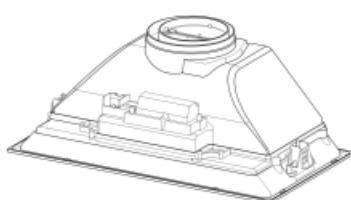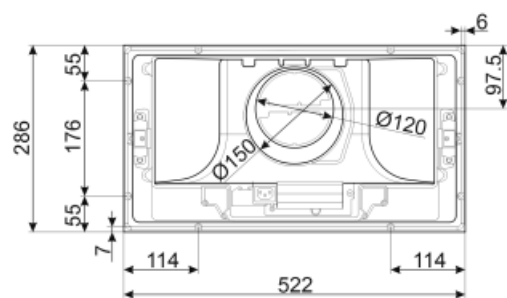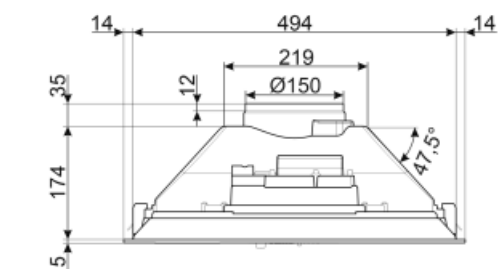

Not included accessories

KITFC6191

Charcoal filter round (kit 2 pieces)



Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



C: Product energy rating



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.