

KICGR52X



Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709262211
Hood width	52 cm



Aesthetics




Aesthetic	Universale	Finishing	Satin
Colour	Stainless steel	Logo	Silk screen

Controls



Control setting	Electronic buttons	Display	1 a LED
Led color	Red		

Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent	

Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Aluminium

Light Power	1 W	Filter replacement indicator	Yes
Light color temperature scale (°K)	4000 °K	Vent outlet	150 mm
Free outlet maximum capacity	720 m³/h	Minimum distance from GAS hob	650 mm
Motor power	270 W	Minimum distance from ELECTRIC hob	550 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	300	57
Speed 2	450	67
Speed 3	600	71
Intensive speed	680	73

Accessories Included

Tube reduction	Yes
----------------	-----

Performance / Energy Label

A

Annual Efficiency Consumption (AEChood)	54 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	71 dB(A)
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dB(A)
Fluid Dynamic Efficiency (FDE)	29,2	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	73 lux/W	Energy Efficiency Index	51,7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	382 m³/h
Grease Filtering Efficiency (GFE)	75,1 %	Measured air pressure at best efficiency point (Pbep)	435 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	158 W
Air flow at mininum speed (Qmin)	300 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	600 m³/h	Average illumination of the light on the cooking surface (Emiddle)	160 lux
Air flow at boost speed (Qboost)	680 m³/h		
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	57 dB(A)		

Sound power level at
highest setting (Lwa)

71 dB(A)

Electrical Connection

Electrical connection rating
Voltage


272 W

220-240 V

Frequency (Hz)
Power supply cable
length

50-60 Hz

1500 mm

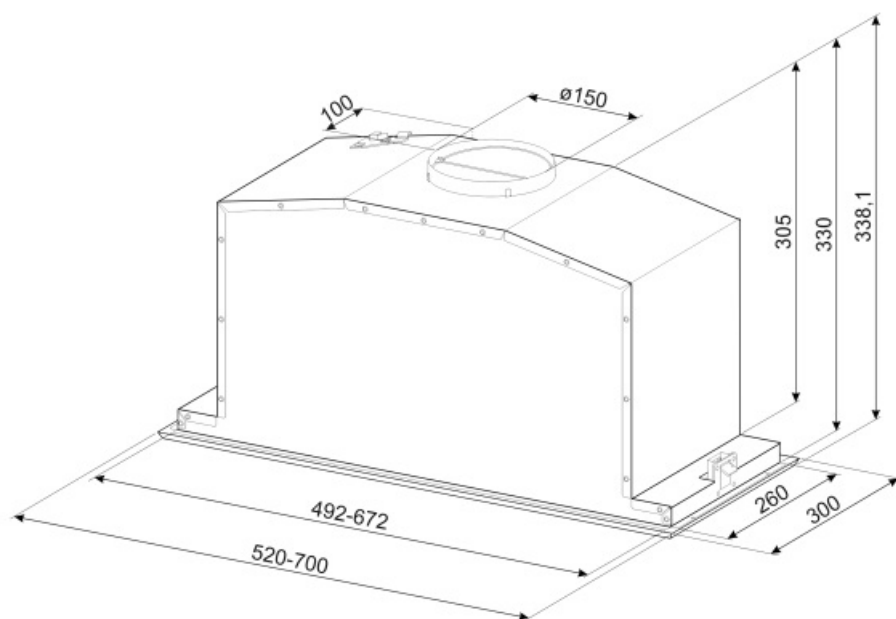

Not included accessories



KITFC152











Charcoal filters Round Kit 2 pieces



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

Symbols glossary (TT)

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A: Product drying performance, measured from A+++ to D / G depending on the product family
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		A smart infrared system, which allows a hood and hob with this feature to work together.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		LED display: to show programmes, functions and options selected and the time to the end of the cycle.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Perimeter extraction panels: very efficient and aid noise reduction.		Intensive/turbo setting: when extra fast extraction is required.