

KPFA12X

Product family Hood

Hood Type Decorative wall hood

Design Chimney Extraction Extraction

Stainless Steel + Painted Material Material

Type of steel Brushed

8017709293505 **EAN** code

Hood width 120 cm **Aesthetic** Portofino Colour Stainless steel

Serigraphy colour Black Logo **Applied**



650 mm

Controls

Control knobs Control knobs Portofino Control setting No. of controls Controls colour Steel effect 2

Program / Functions

No. of speeds Intensive speed

Technical Features



capacity





No. of lights No. of filters 4

LED Light type Anti-grease filters Stainless steel 4 W 150 mm **Light Power** Vent outlet Light color temperature 4000 K Minimum distance from 650 mm

scale (K) GAS hob

Minimum distance from Light color temperature 3000 - 5700 K

ELECTRIC hob range

Free outlet maximum 815 m³/h Non return valve Yes

275 W Motor power

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	287	49

SMEG SPA 2/12/2025



Speed 2	389	58
Speed 3	606	67
Intensive speed	777	73

Performance / Energy Label

_/		A'''
	Δ.	Ť
		D

Annual Efficiency 42 kWh/a Airbourne acoustical A- 73 dBA weighted sound power Consumption (AEChood) emission at boost speed Energy efficieency class A+ (SPEboost) (EEC) Time increase factor (F) 0,7 Fluid Dynamic Efficiency 36,3 (FDE) **Energy Efficiency Index** Lighting Efficiency (LE) 74,8 lux/W Measured air flow rate 400 m³/h at best efficiency point Grease Filterina 74.9 % (Qbep) Efficiency (GFE) Measured air pressure 490 Pa Air flow at minumum 287 m³/h at best efficiency point speed (Qmin) (Pbep) Air flow at maximum 606 m³/h Measured electric 150 W speed (Qmax) power input at best Air flow at boost speed 777 m³/h efficiency point (Wbep) (Qboost) **Nominal Power** 4 W Airbourne acouistical A- 49 dBA consumption of the light weighted sound Power system (WL) **Emission at minimum** Average illumination of 329 lux speed (SPEmin) the light on the cooking Airborne acoustical A-67 dBA surface (Emiddle) weighted sound Power Sound power level at 67 dBA **Emission at maximum** highest setting (Lwa) speed (SPEmax)

Electrical Connection


Voltage 220-240 V Power supply cable 1000 mm Frequency (Hz) 50-60 Hz length

Also available

Alternative colours White, Black, Red, Available colours KPF12WH/BL/X/RD/T availible Turquese

SMEG SPA 2/12/2025



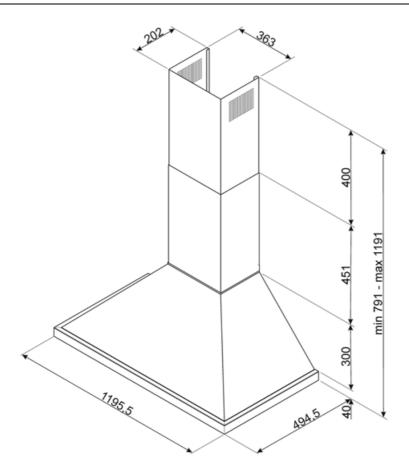

SMEG SPA 2/12/2025



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



...



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 2/12/2025